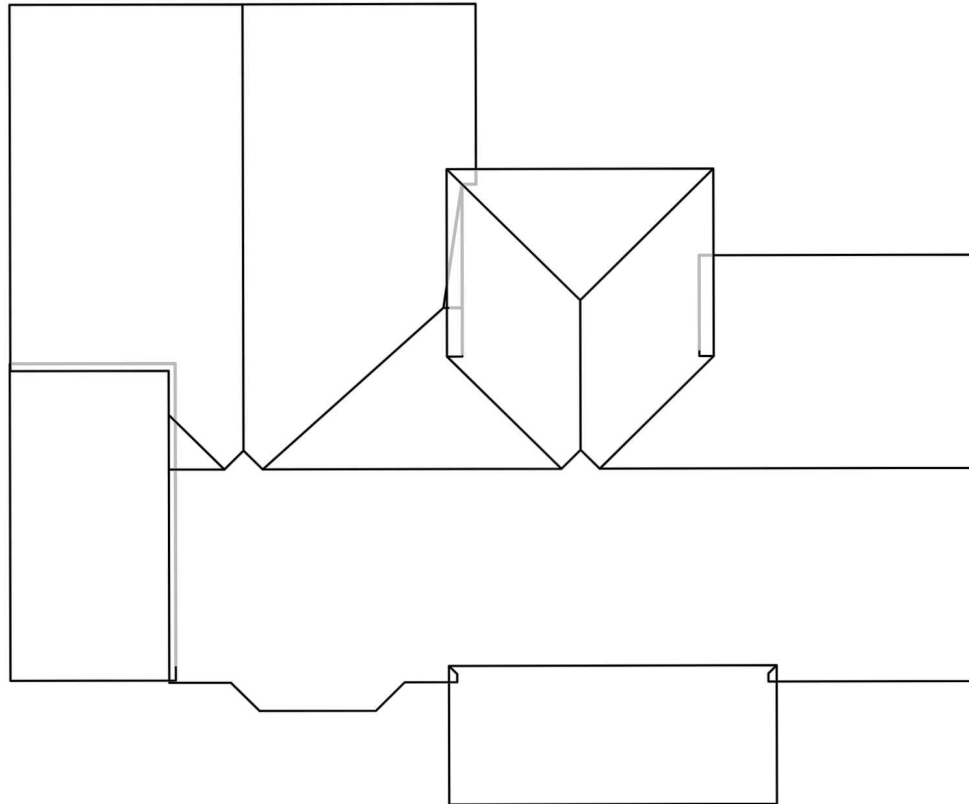


**PROJECT SUMMARY**

Total Facets: 12
Predominant Pitch: 5/12


Total Squares (Net): 29.52
Total Squares (12% Waste): 33.06

MEASUREMENT BREAKDOWN


Rake:	133'
Eave:	175'
Hip:	34'
Ridge:	90'
Sidewall Flashing:	25'
Headwall Flashing:	32'
Valley:	54'
Transition:	23'




North View




South View

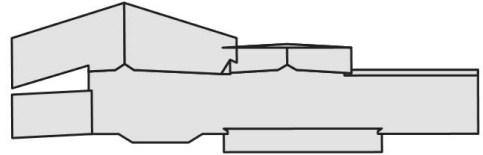


East View

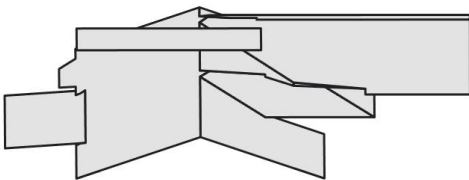

West View

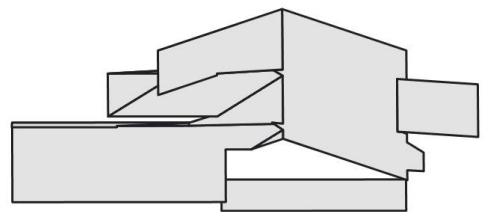


Total Facets: 12

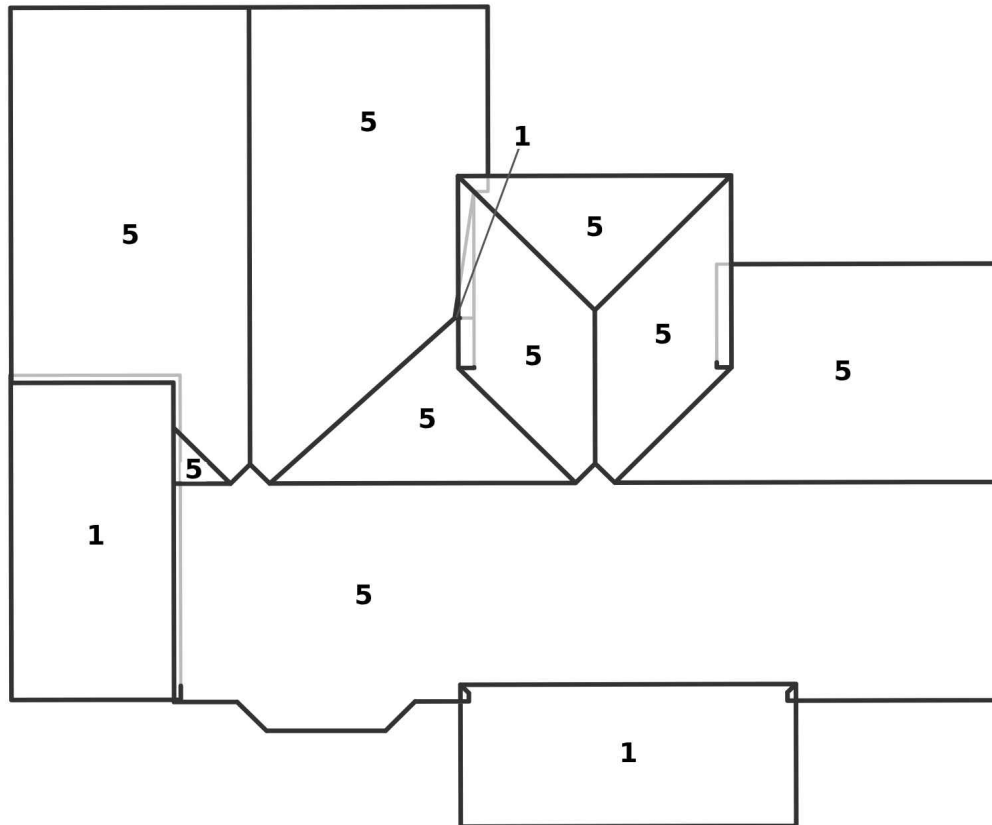



PITCH BREAKDOWN

Pitch	Area	Percent
5/12	24.97	85%
1/12	4.55	15%

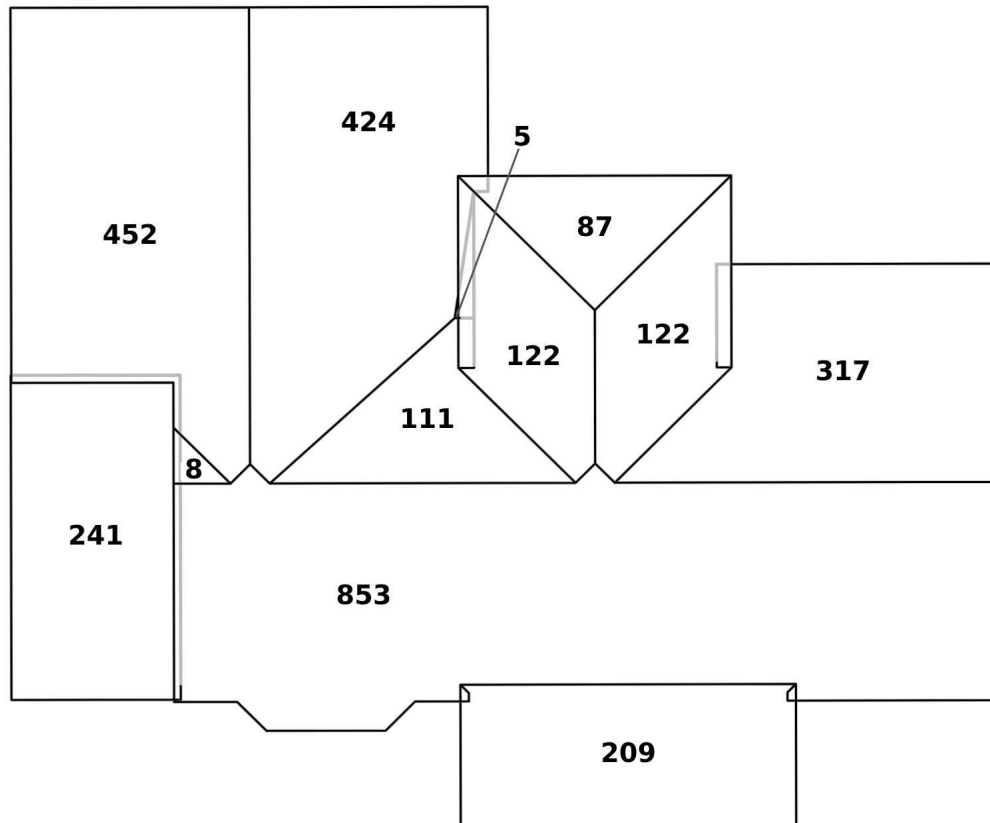

PITCH BREAKDOWN

Pitch	Area	Percent
5/12	24.97	85%
1/12	4.55	15%

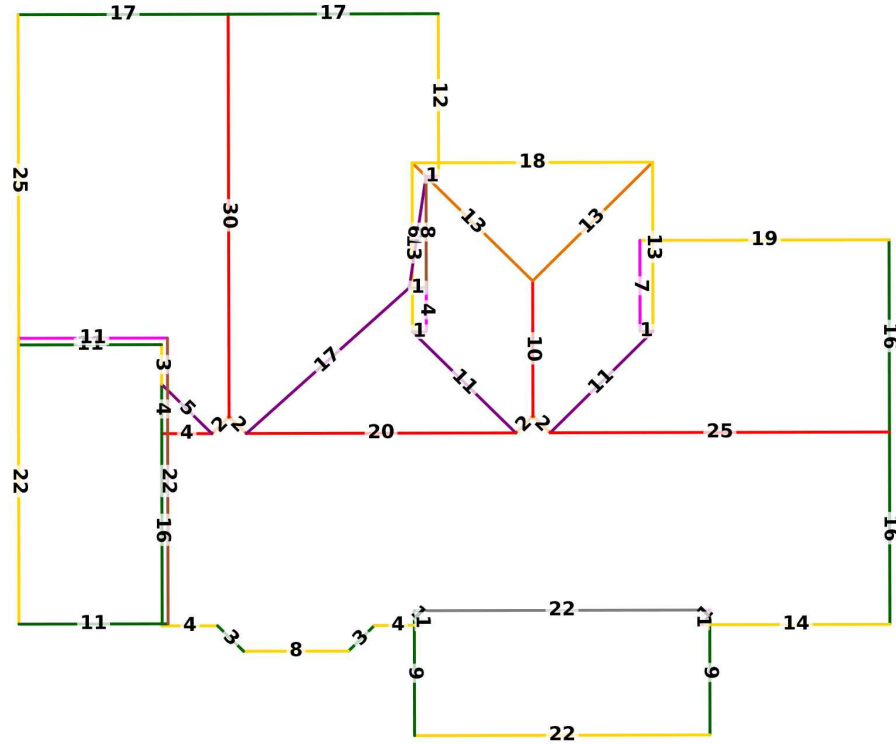


LAYER 1 DETAILS

Facets: 12		Squares Without Waste: 29.5		Squares With Waste: 33.1
Rake: 133'	Eave: 175'	Hip: 34'	Ridge: 90'	Sidewall Flashing: 25'
Headwall Flashing: 32'		Valley: 54'	Transition: 23'	

Pitch	1/12	5/12
Area (sq ft)	455	2,497
Percent	15%	85%

Waste	0%	7%	10%	12%	14%	17%	22%
Area (sq ft)	2,952	3,159	3,247	3,306	3,365	3,454	3,601
Squares	30	32	33	34	34	35	37

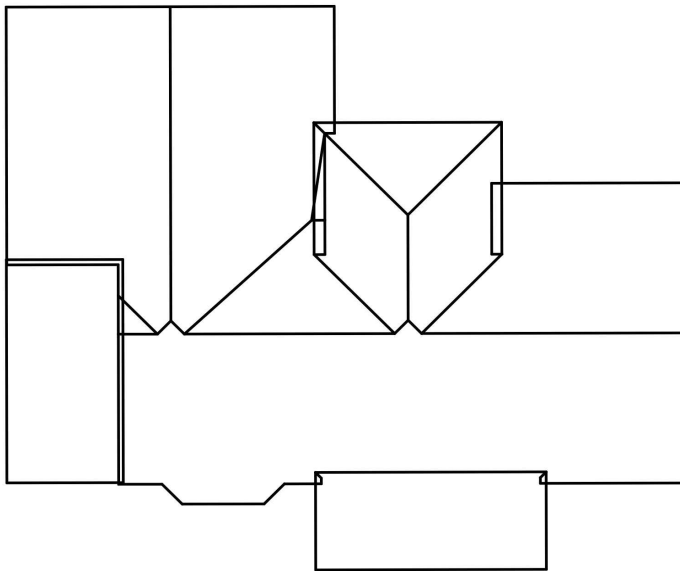

Roof Area	2952 sq ft
Facets	12
Pitch	5 / 12
Ridge	90 ft
Hip	34 ft
Valley	54 ft
Rake	133 ft
Eave	175 ft
Headwall Flashing	32 ft
Sidewall Flashing	25 ft
Transition	23 ft

Measurements rounded. Waste guidance only. Installer to verify.

		Waste	0%	7%	12%	17%
Shingle Products						
GAF Timberline HDZ	bundle		75	81	85	88
OC TruDef Duration	bundle		75	81	85	88
CertainTeed Landmark	bundle		75	81	85	88
Malarkey Vista AR	bundle		100	107	113	117
Starter Strip						
GAF Pro-Start	bundle		3	4	4	4
OC Starter Strip	bundle		3	4	4	4
CertainTeed SwiftStart	bundle		4	5	5	5
Malarkey Starter Strip	bundle		4	5	5	5
Hip & Ridge Cap						
GAF Seal-A-Ridge	bundle		5	6	6	6
OC ProEdge	bundle		4	5	5	5
CertainTeed Shadow Ridge	bundle		5	6	6	6
Malarkey EZ-Ridge	bundle		5	6	6	6
Synthetic Underlayment						
GAF FeltBuster	roll		3	4	4	4
OC ProArmor	roll		3	4	4	4
CertainTeed RoofRunner	roll		3	4	4	4
Malarkey Secure Start Plus	roll		3	4	4	4
Ice & Water Shield						
36" perimeter application (1229 sq ft)						
GAF WeatherWatch	roll		7	8	8	9
OC WeatherLock Flex	roll		6	7	7	8
CertainTeed WinterGuard	roll		7	8	8	9
Malarkey Secure Start I&W	roll		7	8	8	9
18" perimeter application (768 sq ft)						
GAF WeatherWatch	roll		4	5	5	5
OC WeatherLock Flex	roll		4	5	5	5
CertainTeed WinterGuard	roll		4	5	5	5
Malarkey Secure Start I&W	roll		4	5	5	5

		Waste	0%	7%	12%	17%
Metals & Flashing						
Eave Drip Edge (10 ft)	piece		18	20	21	22
Rake Drip Edge (10 ft)	piece		14	15	16	17
Valley Metal W (10 ft)	piece		6	7	7	8
Step Flashing (5x7)	piece		104	112	117	122
Counter Flashing (10 ft)	piece		3	4	4	4
Headwall Flashing (10 ft)	piece		6	7	7	8
Ventilation						
Ridge Vent (4 ft sections)	piece		23	25	26	27
Accessories						
Coil Nails (1.25 in, 50 lb)	box		2	3	3	3
Plastic Cap Nails	box		1	2	2	2
Roofing Caulk (Tube)	tube		2	3	3	3

Flat Roof Area: 455.303 sq ft (4.55 sq) | Waste: 12%

Material	Unit	TPO (Adh)	TPO (MF)	EPDM	PVC	Mod Bit
Membrane System						
Membrane / Cap Sheet	roll	2	2	2	2	6
Bonding Adhesive	gal	9	—	9	9	—
Insulation & Cover Board						
1/2" 4x8 Cover Board	SQ	6	6	6	6	6
Cover Board (4'x8')	sheet	17	17	17	17	17
Polyiso Insulation (4'x8')	sheet	17	17	17	17	17
3" Insulation Plates	ea	384	384	384	384	384
2" HD Fasteners	1000	1	1	1	1	1
Mechanically-Fastened (TPO Only)						
2-3/8" Membrane Plates	1000	—	1	—	—	—
Seam Fasteners (for membrane plates)	1000	—	1	—	—	—
Edge & Termination						
Termination Bar (10 ft)	piece	—	—	—	—	—
Edge Metal (10 ft)	piece	35	35	35	35	35
Sealant & Accessories						
Walk Pad (34"x50')	roll	2	2	2	2	—
TPO Cut Edge Sealant	each	2	2	—	—	—
Cleaner	each	1	1	—	—	—
Universal Single Ply Sealant	tube	11	11	11	11	—
Sealant / Caulk	tube	4	4	4	4	4

Sections at 2/12 or below classified as low-slope. Quantities include 12% waste where applicable. Numbers are estimates only.

VENTILATION SUMMARY

Estimated Attic Area

2,703 sq ft

Footprint: 2,758 sq ft | Surface: 2,952 sq ft

Recommended Exhaust

649 sq in

Recommended Intake

649 sq in

NFVA Requirement

1/300

NFVA: 1298 sq in
Exhaust: 649 sq in
Intake: 649 sq in

Recommended

1/150

NFVA: 2595 sq in
Exhaust: 1298 sq in
Intake: 1298 sq in

Exhaust Options

Ridge Vent

Needed: 36' (@ 18"/lf)
Available: 86'
Capacity sufficient

Recommended

Box Vents

Needed: 13 vents
50 sq in NFA each
Total: 650 sq in

RECOMMENDED INTAKE PRODUCTS

Product	Rating	Qty Needed
Vented Drip Edge	9 sq in/ft	73 ft
Soffit Vent	9 sq in/ft	73 ft
Bird Blocks	~3.5 sq in	186 ea


Key

 Ridge Vent

 Box Vent



Note: The estimated quantity of attic ventilation products in this report is based on the estimated attic floor area and is meant for estimating purposes only. It is the responsibility of the installer to verify the correct quantity and type of attic ventilation products prior to commencement of work. Installer must always review job-specific attic ventilation needs such as local code requirements, attic floor square footage, roof design, and conditioned spaces under the roof. GAF recommends a minimum of 1 square foot of attic ventilation (evenly split between intake and exhaust) for every 150–300 square feet of attic floor space depending on vapor barrier status. The amount of exhaust ventilation at or near the ridge must never exceed the amount of intake ventilation at or near the soffit. See gaf.com/ventcalculator for details.

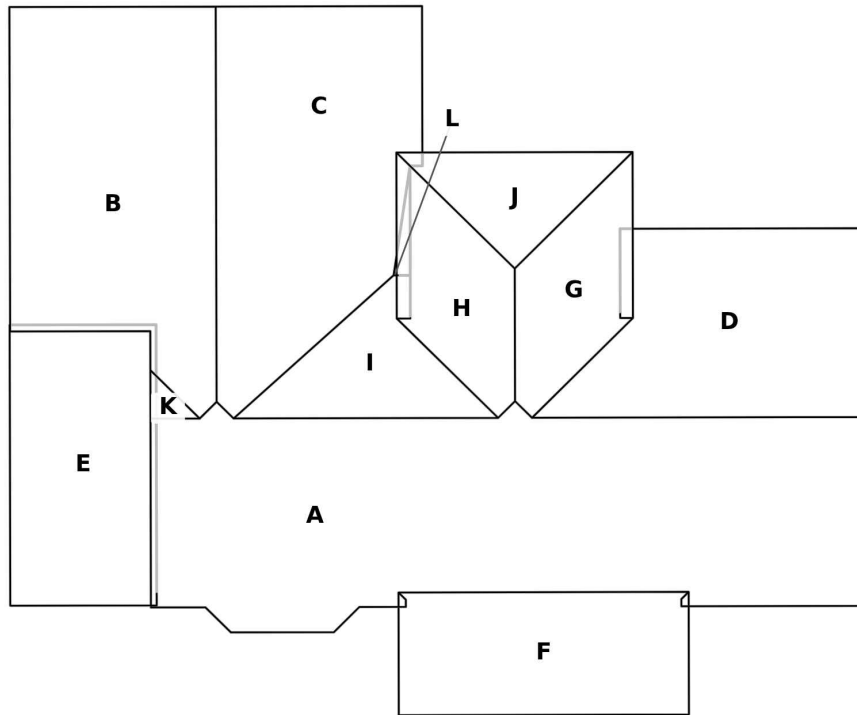

33.06 sq · 5/12 · 12 facets

NOTES
