
FIRST MATE

4725 W Mercer Way, Mercer Island, WA 98040
10/23/2026

Property Measurement Report



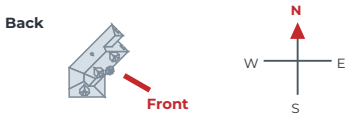

Front 120 deg / North up

ROOF SUMMARY

Total Facets: 39
Predominant Pitch: 12/12

Total Squares (Net): 46.78
Total Squares (21% Waste): 56.6


EXTERIOR SUMMARY


Net wall area:	4261 sq ft
Gross wall area:	4550 sq ft
Wall regions:	67
Openings:	20
Opening area:	289 sq ft

FIRST MATE


Top-Down Roof View

N

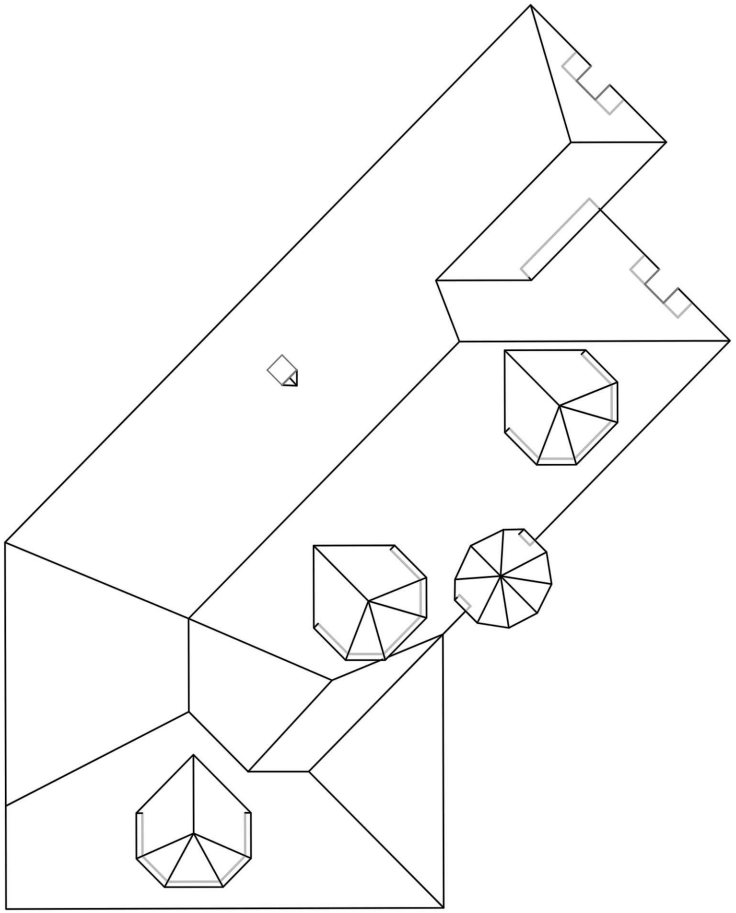


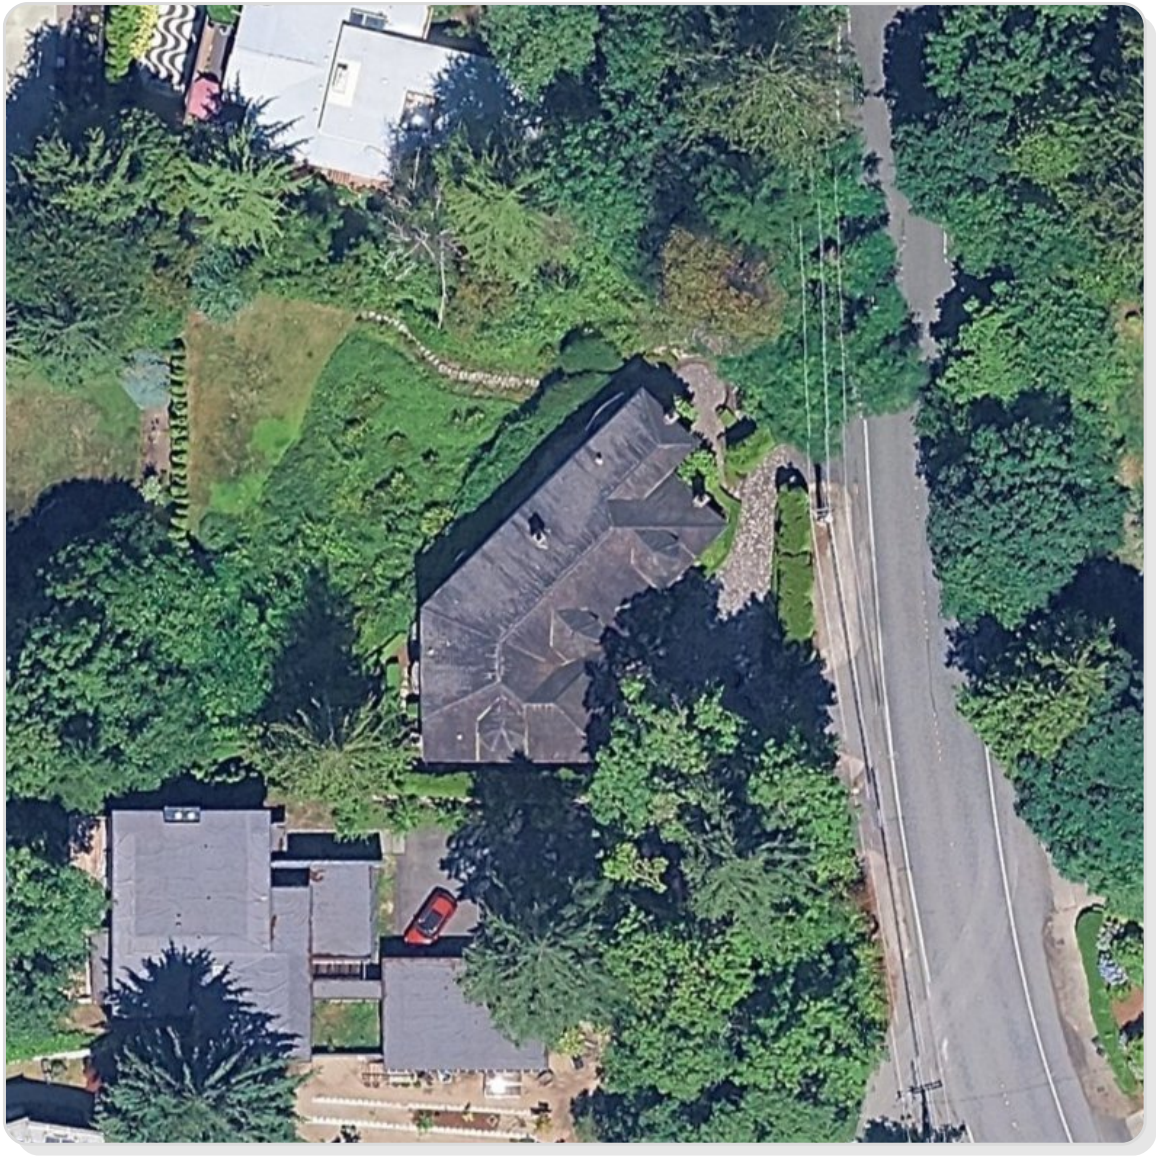


Front Right

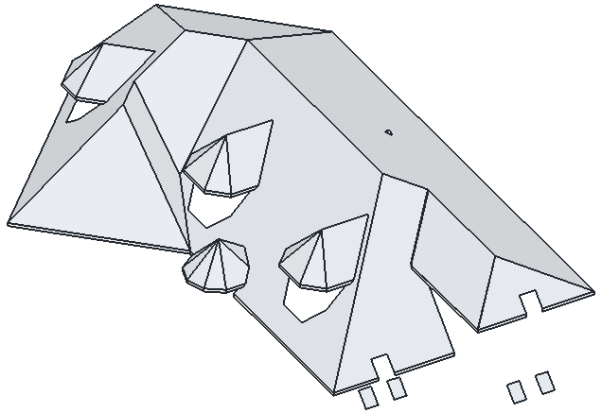


Front Left

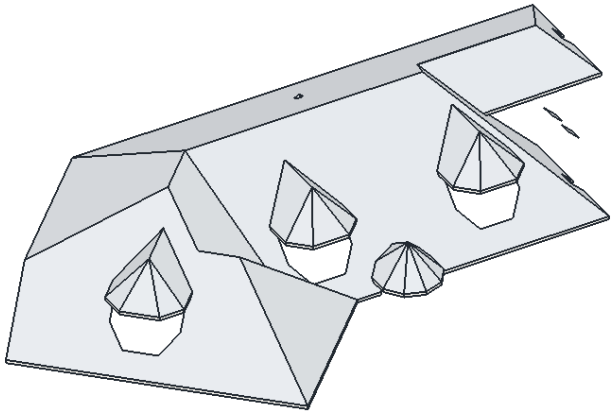

Back Right

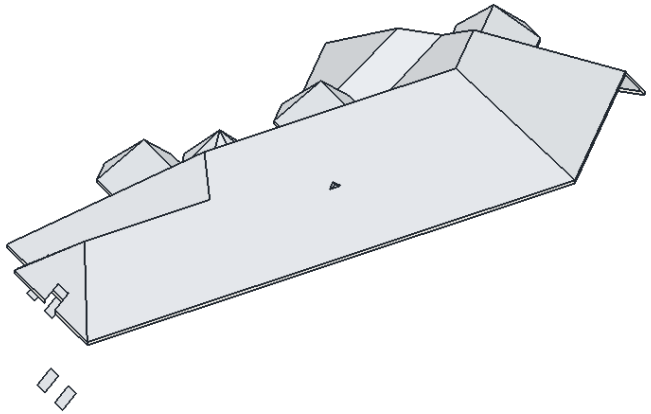

Back Left

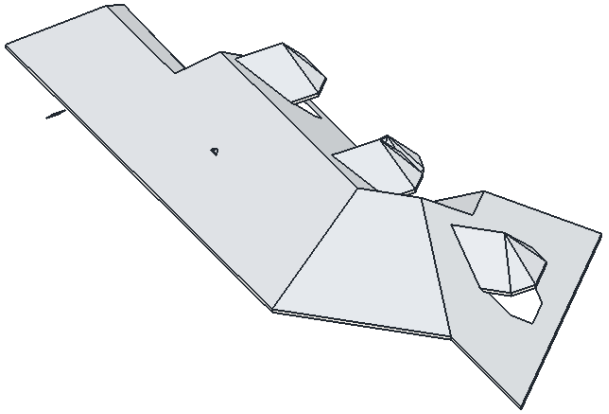


FIRST MATE

Roof Summary

Pitch	6/12	10/12	11/12	12/12	13/12
Area (sq ft)	1,438	17	73	**2,855**	294
Percent	31%	0%	2%	**61%**	6%

Waste	0%	16%	19%	21%	23%	26%	31%
Area (sq ft)	4,678	5,426	5,566	**5,660**	5,754	5,894	6,128
Squares	47	55	56	**57**	58	59	62

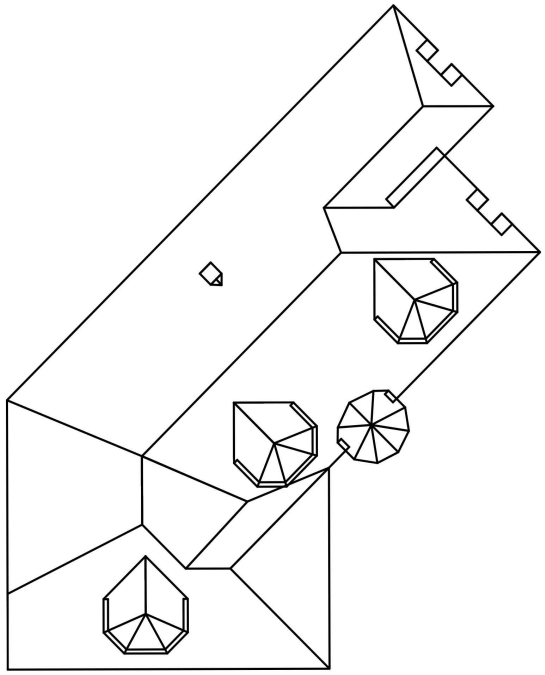

Roof Area	4678 sq ft
Facets	39
Pitch	12 / 12
Chimneys	3
Ridge	93 ft
Hip	311 ft
Valley	128 ft
Rake	33 ft
Eave	336 ft
Headwall Flashing	59 ft
Sidewall Flashing	98 ft
Chimney Back Pan	7 ft
Chimney Step	26 ft
Chimney Apron	2 ft
Counter Flashing	36 ft

Measurements rounded. Waste guidance only. Installer to verify.

	Waste	0%	16%	21%	26%
Shingle Products					
GAF Timberline HDZ	bundle	141	164	**171**	178
OC TruDef Duration	bundle	141	164	**171**	178
CertainTeed Landmark	bundle	141	164	**171**	178
Malarkey Vista AR	bundle	141	164	**171**	178
Starter Strip					
GAF Pro-Start	bundle	4	5	**5**	6
OC Starter Strip	bundle	4	5	**5**	6
CertainTeed SwiftStart	bundle	4	5	**5**	6
Malarkey Starter Strip	bundle	4	5	**5**	6
Hip & Ridge Cap					
GAF Seal-A-Ridge	bundle	17	20	**21**	22
OC ProEdge	bundle	13	16	**16**	17
CertainTeed Shadow Ridge	bundle	14	17	**17**	18
Malarkey EZ-Ridge	bundle	17	20	**21**	22

	Waste	0%	16%	21%	26%
Synthetic Underlayment					
GAF FeltBuster	roll	6	7	**8**	8
OC ProArmor	roll	6	7	**8**	8
CertainTeed RoofRunner	roll	6	7	**8**	8
Malarkey Secure Start Plus	roll	6	7	**8**	8
Ice & Water Shield					
36” perimeter application (1893 sq ft)					
GAF WeatherWatch	roll	10	12	**13**	13
OC WeatherLock Flex	roll	9	11	**11**	12
CertainTeed WinterGuard	roll	10	12	**13**	13
Malarkey Secure Start I&W	roll	10	12	**13**	13
18” perimeter application (1339 sq ft)					
GAF WeatherWatch	roll	7	9	**9**	9
OC WeatherLock Flex	roll	6	7	**8**	8
CertainTeed WinterGuard	roll	7	9	**9**	9
Malarkey Secure Start I&W	roll	7	9	**9**	9

	Waste	0%	16%	21%	26%
Metals & Flashing					
Eave Drip Edge (10 ft)	piece	34	40	**42**	43
Rake Drip Edge (10 ft)	piece	4	5	**5**	6
Valley Metal W (10 ft)	piece	13	16	**16**	17
Step Flashing (5x7)	piece	267	310	**324**	337
Counter Flashing (10 ft)	piece	14	17	**17**	18
Headwall Flashing (10 ft)	piece	6	7	**8**	8
Chimney Apron (front)	ea	4	5	**5**	6
Chimney Back Pan / Cricket	ea	4	5	**5**	6
Chimney Step Flashing	piece	57	67	**69**	72
Chimney Counter Flash (10 ft)	piece	4	5	**5**	6

	Waste	0%	16%	21%	26%
Ventilation					
Ridge Vent (4 ft sections)	piece	24	28	**30**	31
Accessories					
Coil Nails (1.25 in, 50 lb)	box	3	4	**4**	4
Plastic Cap Nails	box	1	2	**2**	2
Roofing Caulk (Tube)	tube	3	4	**4**	4

VENTILATION SUMMARY

Estimated Attic Area

3,500 sq ft

Footprint: 3,572 sq ft | Surface: 4,678 sq ft

Recommended Exhaust
840 sq in

Recommended Intake
840 sq in

NFVA Requirement

1/300	1/150
NFVA: 1680 sq in Exhaust: 840 sq in Intake: 840 sq in **Recommended**	NFVA: 3360 sq in Exhaust: 1680 sq in Intake: 1680 sq in

Exhaust Options

Ridge Vent	Box Vents
Needed: 47' (@ 18"/lf) Available: 92' Capacity sufficient **Recommended**	Needed: 17 vents 50 sq in NFA each Total: 850 sq in



RECOMMENDED INTAKE PRODUCTS


Product	Rating	Qty Needed
Vented Drip Edge	9 sq in/ft	**94 ft**
Soffit Vent	9 sq in/ft	**94 ft**
Bird Blocks	~3.5 sq in	**240 ea**

Note: The estimated quantity of attic ventilation products in this report is based on the estimated attic floor area and is meant for estimating purposes only. It is the responsibility of the installer to verify the correct quantity and type of attic ventilation products prior to commencement of work. Installer must always review job-specific attic ventilation needs such as local code requirements, attic floor square footage, roof design, and conditioned spaces under the roof. GAF recommends a minimum of 1 square foot of attic ventilation (evenly split between intake and exhaust) for every 150–300 square feet of attic floor space depending on vapor barrier status. The amount of exhaust ventilation at or near the ridge must never exceed the amount of intake ventilation at or near the soffit. See gaf.com/ventcalculator for details.

FIRST MATE

Roof Pitch Diagram

Total Facets: 39

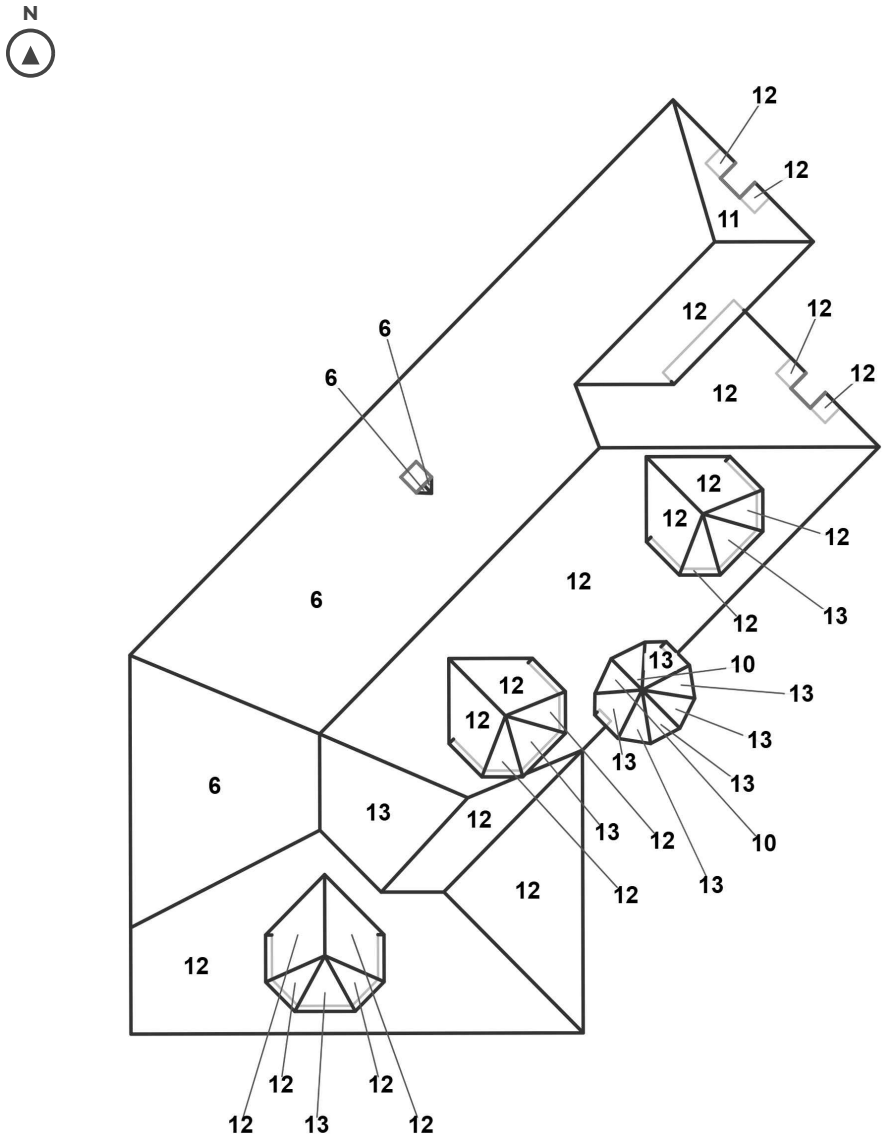


PITCH BREAKDOWN

Pitch	Area	Percent
12/12	**28.55**	**61%**
6/12	14.38	31%
13/12	2.94	6%
11/12	0.73	2%
10/12	0.17	0%

FIRST MATE

Roof Area Diagram

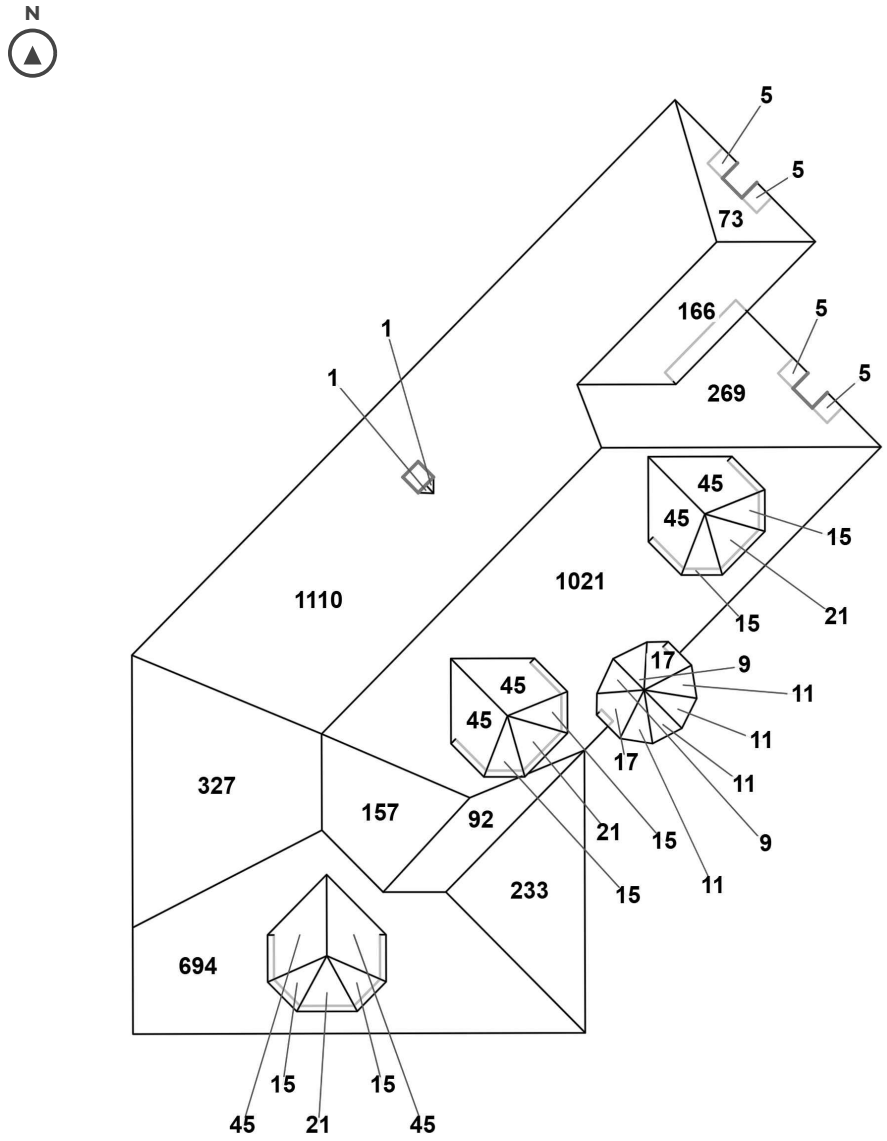


PITCH BREAKDOWN

Pitch	Area	Percent
12/12	28.55	61%
6/12	14.38	31%
13/12	2.94	6%
11/12	0.73	2%
10/12	0.17	0%

FIRST MATE

Roof Layer 1 Measurements

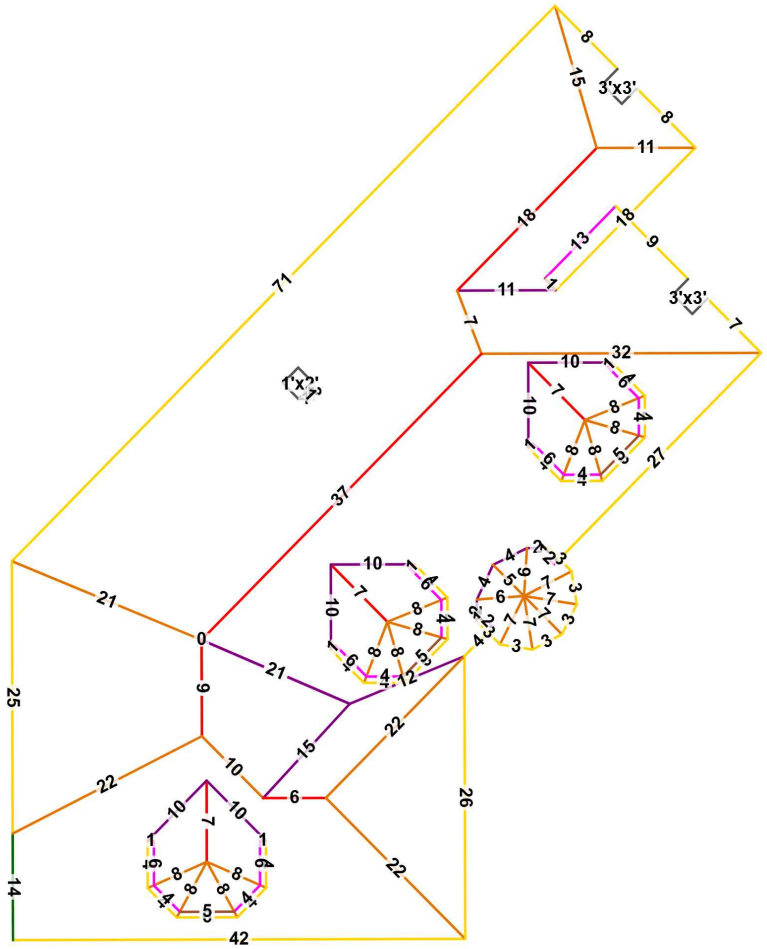

LAYER 1 DETAILS

Facets: 35

Squares Without Waste: 46.6

Squares With Waste: 56.3

Eave: 328'	Valley: 128'	Hip: 311'
Ridge: 93'	Headwall Flashing: 51'	
Rake: 17'	Sidewall Flashing: 98'	

- Ridge
- Hip
- Valley
- Rake
- Eave
- Headwall Flashing
- Sidewall Flashing

Roof Layer 2 Measurements



LAYER 2 DETAILS

Facets: 4

Squares Without Waste: 0.2

Squares With Waste: 0.3

Eave: 8' Rake: 16'

Headwall Flashing: 8'

- Ridge
- Hip
- Valley
- Rake
- Eave
- Headwall Flashing
- Sidewall Flashing

ACTIVE GUTTER

336 ft

DOWNSPOUTS

13


MITER COUNTS

Outside 90	Inside 90	Non-90
5	0	19

GUTTER DIAGRAM

Run Out 90 In 90 Non-90

N

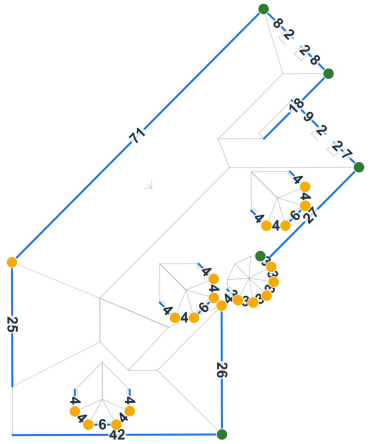


STORIES BY DIRECTION

North	South	East	West
Not set	Not set	Not set	Not set

FIRST MATE

Exterior Summary


NET WALL AREA	GROSS WALL AREA	OPENINGS	WALL REGIONS	OPENING AREA	OPENING PERIMETER	HORIZONTAL RETURNS
4,261 sq ft	4,550 sq ft	20	67	289 sq ft	286 ft	36 sq ft

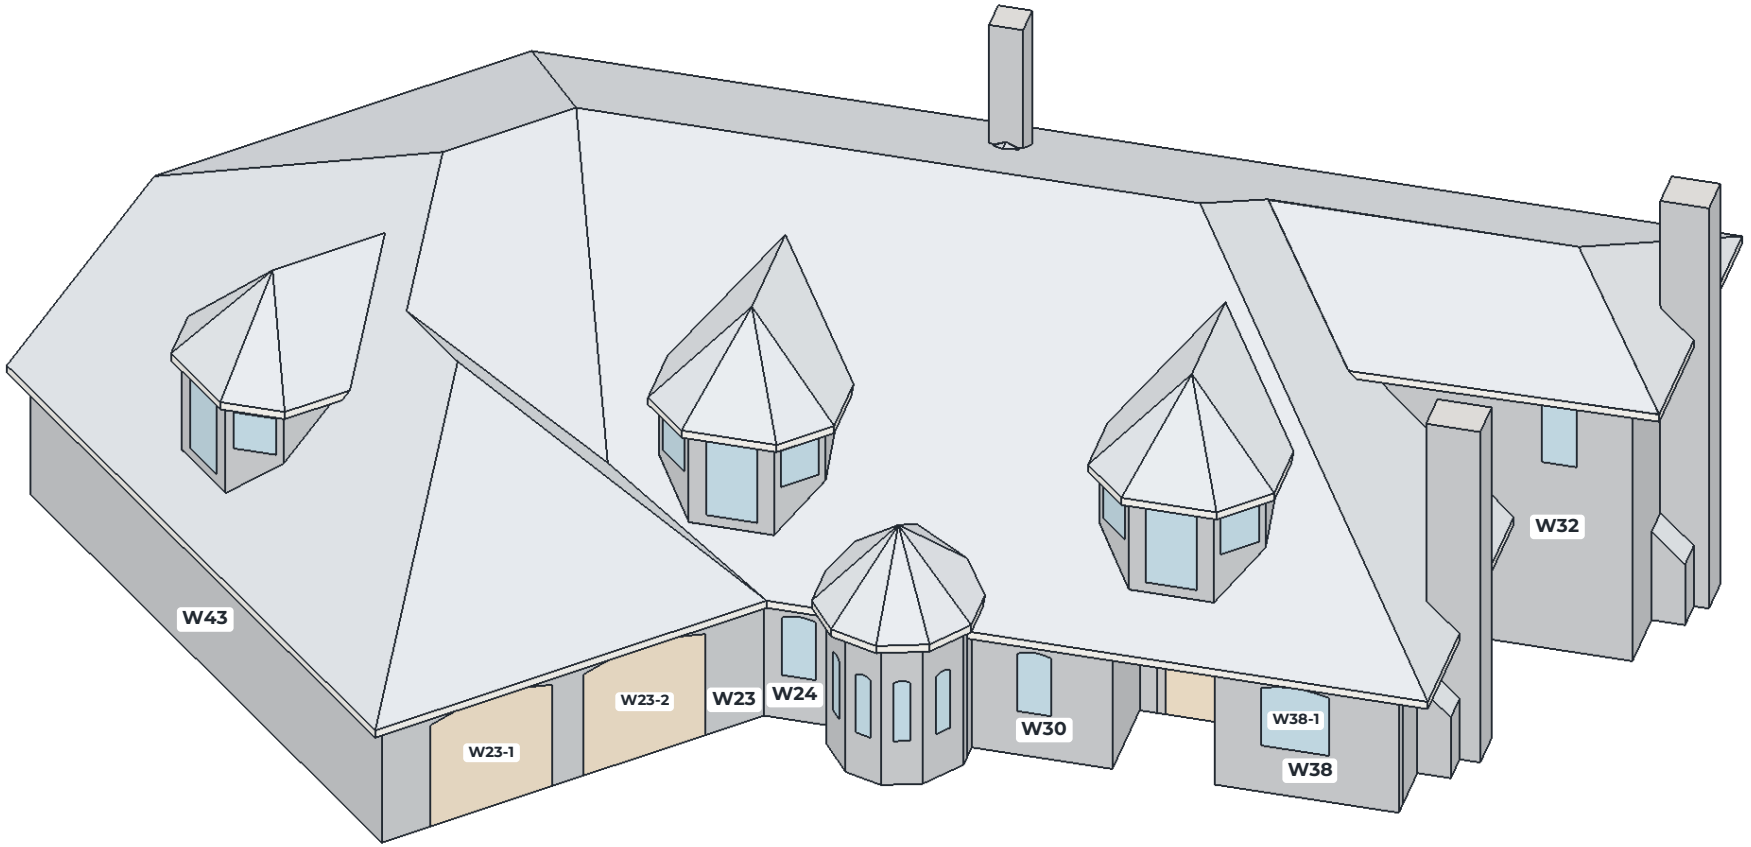


Wall IDs connect the diagrams, dimensions, opening schedule and notes. Each wall face is counted once, on one of the four elevations (front, back, left, right) or as a hidden face, so those totals add up to the gross wall area.

FIRST MATE





Front Elevation

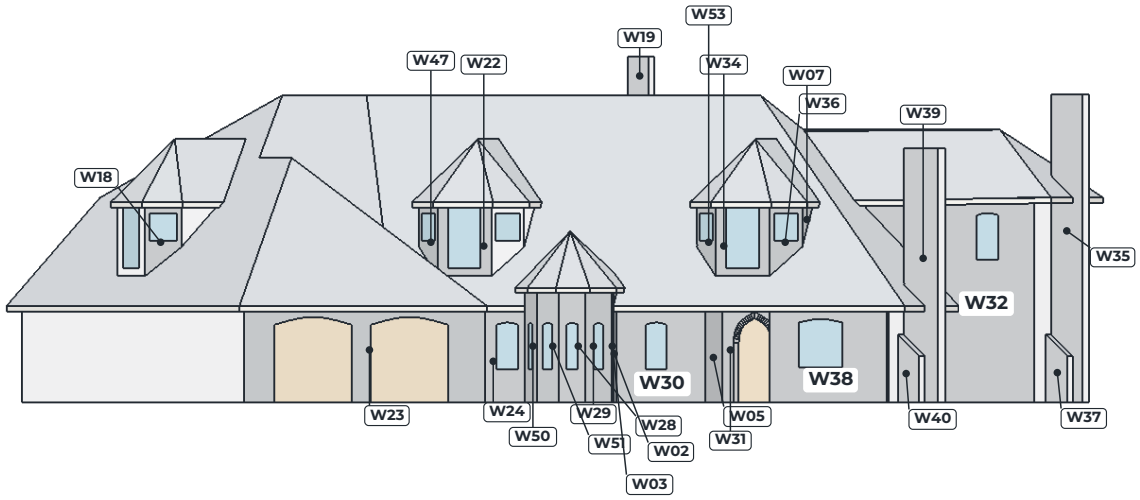

Wall	Material	Gross ft²	Openings ft²
W02	Brick	11.5	-
W03	Brick	8.6	-
W05	Brick	58.5	-
W07	Brick	10.4	-
W18	Brick	20.0	6.2
W19	Brick	16.3	-
W22	Brick	36.2	18.0
W23	Brick	243.8	118.9
W24	Brick	40.4	8.3
W28	Brick	27.3	4.1
W29	Brick	33.8	4.1
W30	Brick	80.6	8.3
W31	Brick	58.5	21.0
W32	Brick	214.2	8.3
W34	Brick	36.2	18.0
W35	Brick	69.0	-
W36	Brick	20.0	6.2
W37	Brick	10.1	-
W38	Brick	105.4	16.8
W39	Brick	62.7	-
W40	Brick	10.1	-
W47	Brick	20.0	6.2
W50	Brick	33.8	4.1
W51	Brick	27.3	4.1
W53	Brick	20.0	6.2
5 pieces < 1 ft²		0.9	-

Total · 30 faces


Gross 1,275.5 ft²

Openings 258.9 ft²

Net 1,016.6 ft²

FIRST MATE

Back Elevation

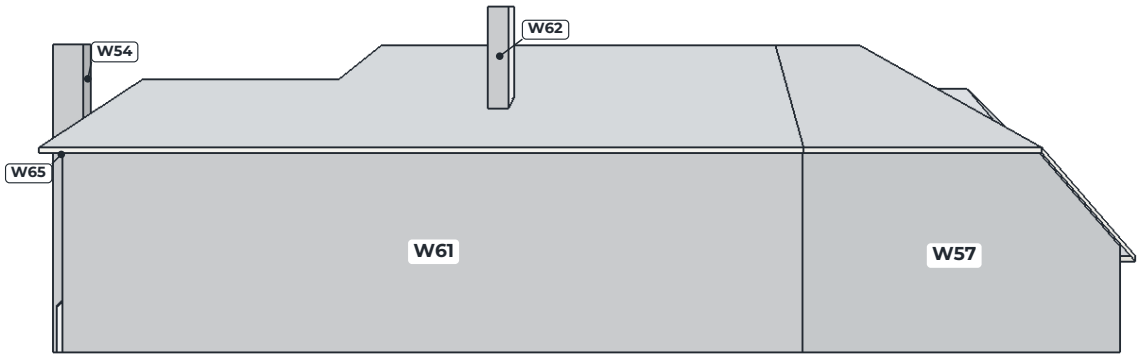


Wall	Material	Gross ft²	Openings ft²
W54	Brick	18.7	-
W57	Brick	582.3	-
W61	Brick	1,299.8	-
W62	Brick	18.8	-
W65	Brick	69.0	-

Total · 5 faces
Gross 1,988.5 ft²
Openings -
Net 1,988.5 ft²

FIRST MATE

Left Elevation

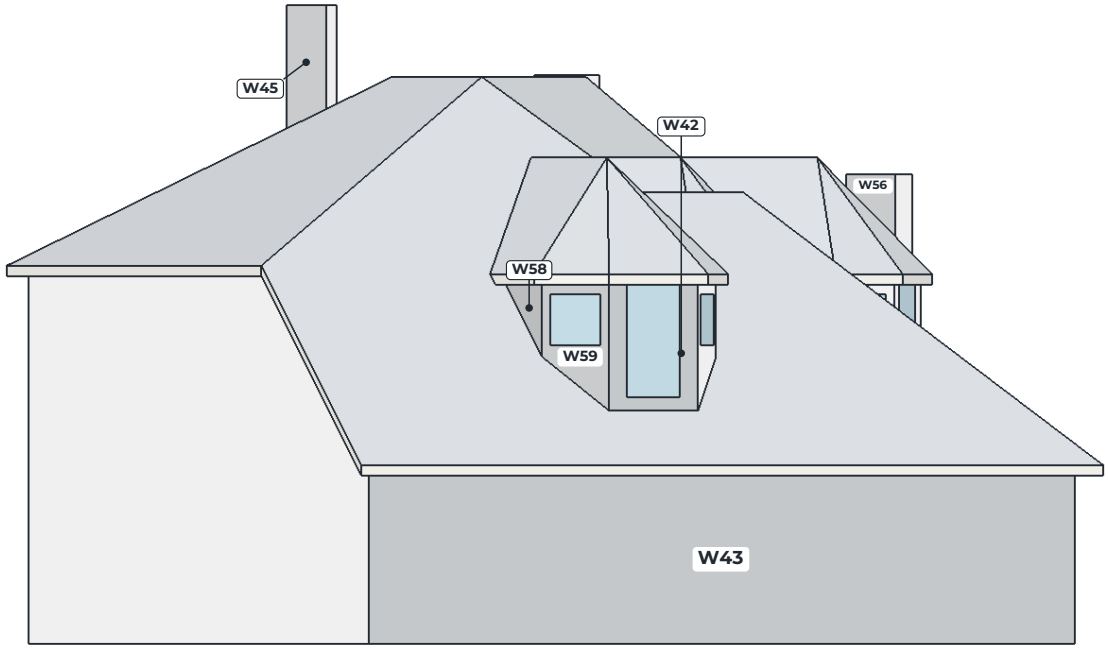


Wall	Material	Gross ft²	Openings ft²
W42	Brick	36.2	18.0
W43	Brick	385.2	-
W45	Brick	17.7	-
W56	Brick	30.8	-
W58	Brick	10.5	-
W59	Brick	20.0	6.2
2 pieces < 1 ft²		0.3	-

Total · 8 faces
Gross 500.7 ft²
Openings 24.2 ft²
Net 476.4 ft²

FIRST MATE

Right Elevation

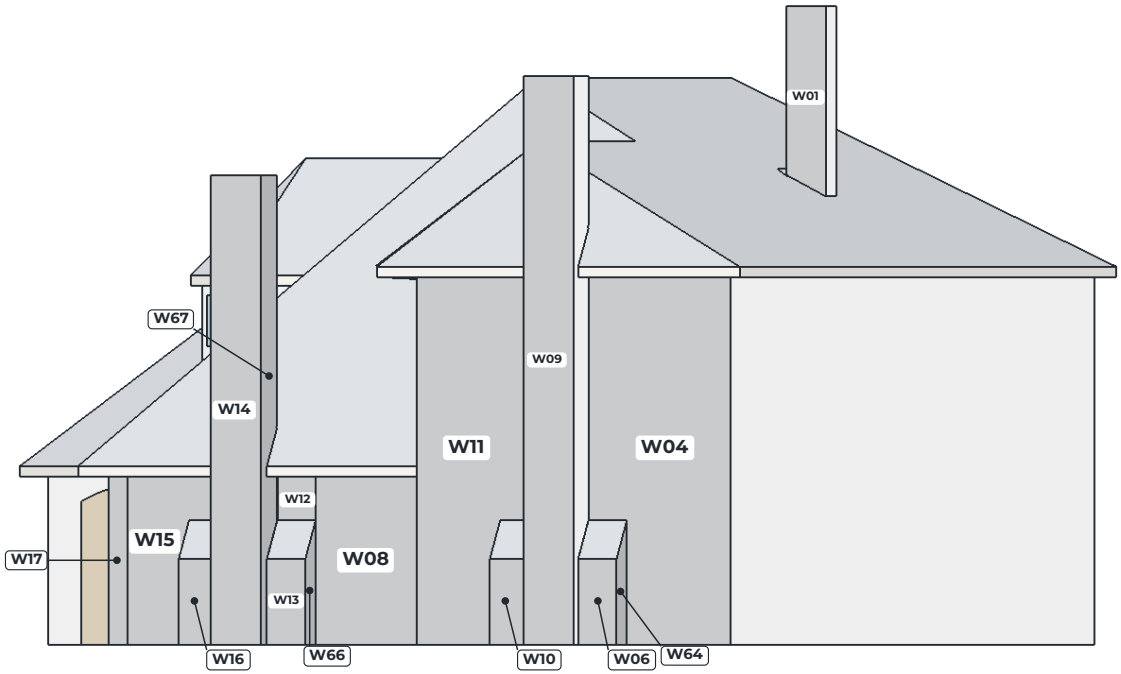

Wall	Material	Gross ft²	Openings ft²
W01	Brick	17.7	-
W04	Brick	130.9	-
W06	Brick	8.1	-
W08	Brick	79.9	-
W09	Brick	69.6	-
W10	Brick	8.1	-
W11	Brick	112.7	-
W12	Brick	8.8	-
W13	Brick	8.1	-
W14	Brick	57.5	-
W15	Brick	41.9	-
W16	Brick	8.1	-
W17	Brick	9.9	-
W64	Brick	10.1	-
W66	Brick	10.1	-
W67	Brick	62.7	-

Total · 16 faces
Gross 644.3 ft²
Openings -
Net 644.3 ft²

Hidden Wall Faces

These faces are not visible in any elevation drawing because other walls or the roof cover them. They are listed here so every face is counted once.

Wall	Material	Gross ft²	Openings ft²
W27	Brick	1.1	-
W46	Brick	10.5	-
W48	Brick	10.4	-
W49	Brick	20.0	-

Wall	Material	Gross ft²	Openings ft²
W52	Brick	10.5	-
W55	Brick	58.5	-
W60	Brick	10.4	-
W63	Brick	20.0	6.2

Total · 8 faces Gross 141.4 ft² Openings 6.2 ft² **Net 135.1 ft²**

W61 / Back

1,299.8 sq ft net




W 68.7' x H 18.9'

Brick

W57 / Back

582.3 sq ft net

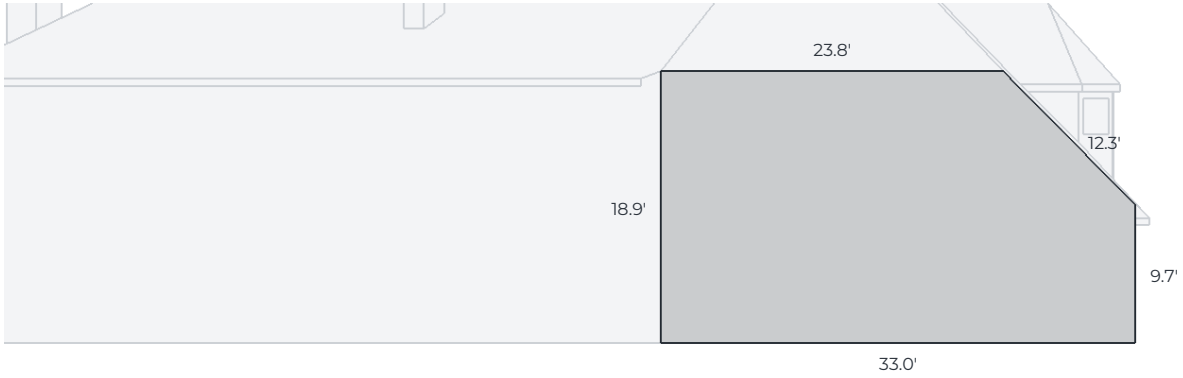


W 33.0' x H 18.9'

Brick

W43 / Left

385.2 sq ft net

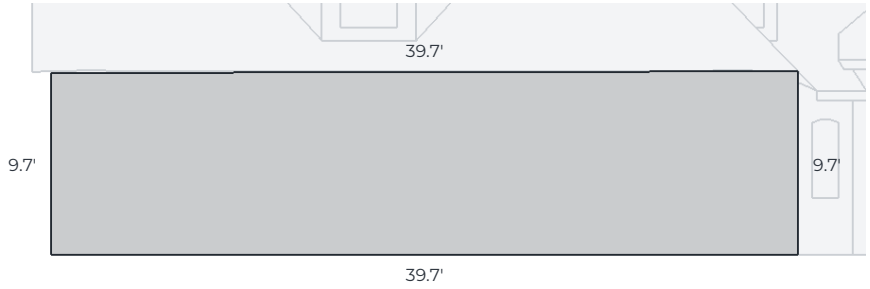


W 39.7' x H 9.7'

Brick

W23 / Front

124.9 sq ft net

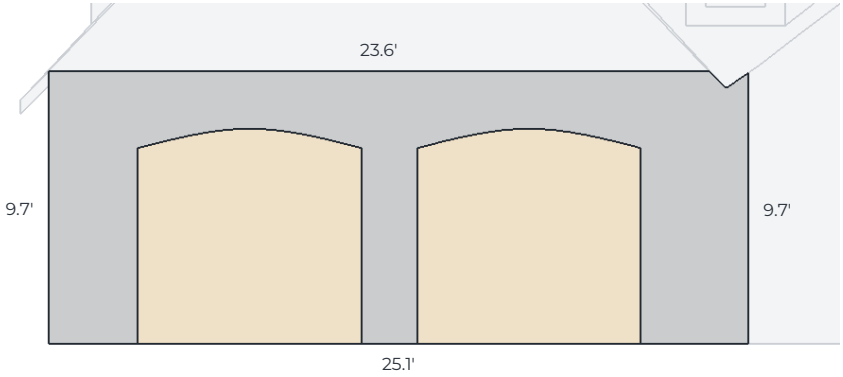


W 25.1' x H 9.7'

Brick

W32 / Front

205.9 sq ft net

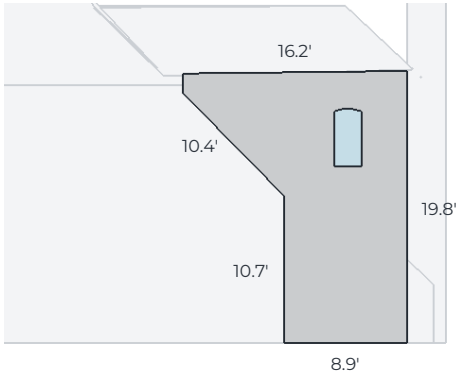


W 16.2' x H 19.8'

Brick

W04 / Right

130.9 sq ft net

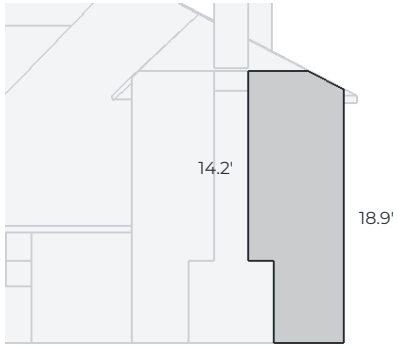


W 7.1' x H 20.3'

Brick

W11 / Right

112.7 sq ft net

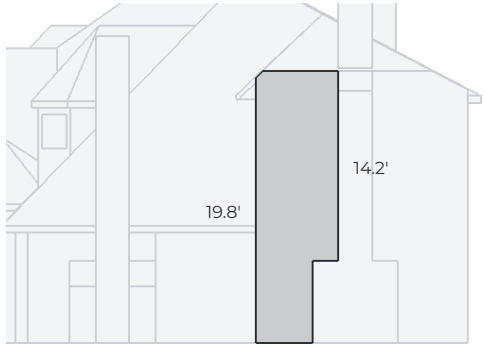


W 6.1' x H 20.3'

Brick

W38 / Front

88.7 sq ft net

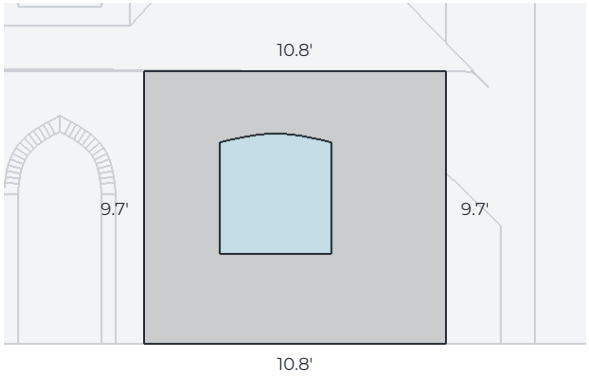


W 10.8' x H 9.7'

Brick

W30 / Front

72.3 sq ft net

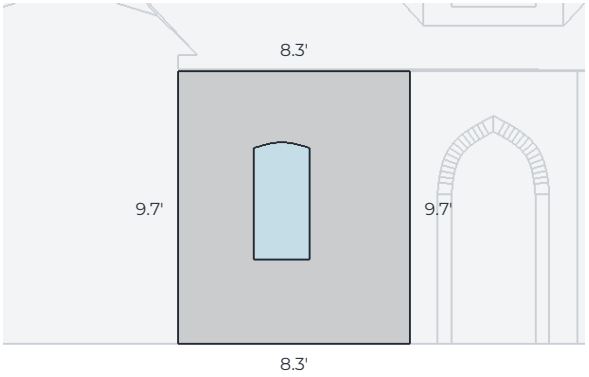


W 8.3' x H 9.7'

Brick

W08 / Right

79.9 sq ft net

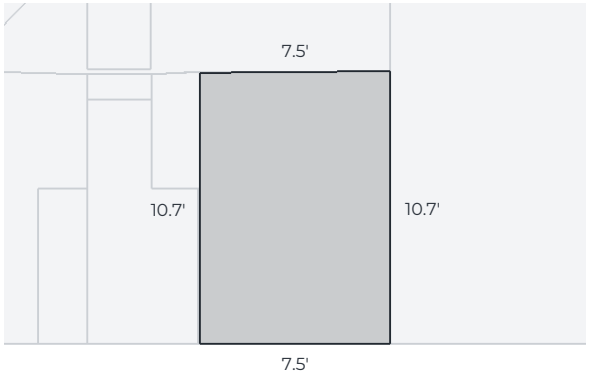

W 7.5' x H 10.7'

Brick

W09 / Right

69.6 sq ft net



W 2.5' x H 27.7'

Brick / Chimney

W35 / Front

69.0 sq ft net




W 2.9' x H 27.7'

Brick / Chimney

W65 / Back

69.0 sq ft net

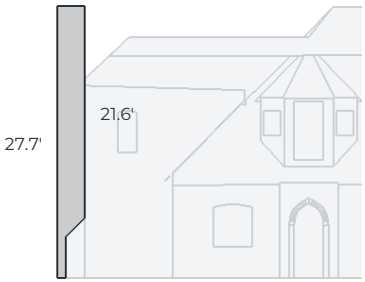


W 2.9' x H 27.7'

Brick / Chimney

W39 / Front

62.7 sq ft net

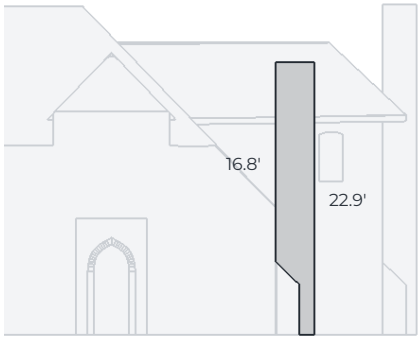


W 3.2' x H 22.9'

Brick / Chimney

W67 / Right

62.7 sq ft net

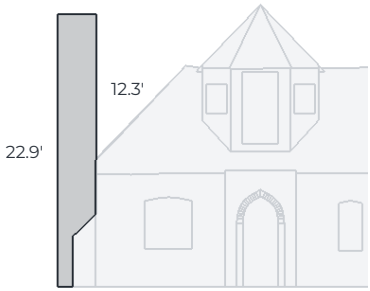


W 3.2' x H 22.9'

Brick / Chimney

W05 / Front

58.5 sq ft net

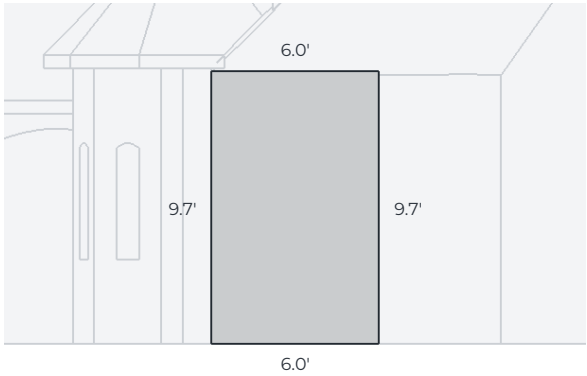


W 6.0' x H 9.7'

Brick

W31 / Front

37.5 sq ft net

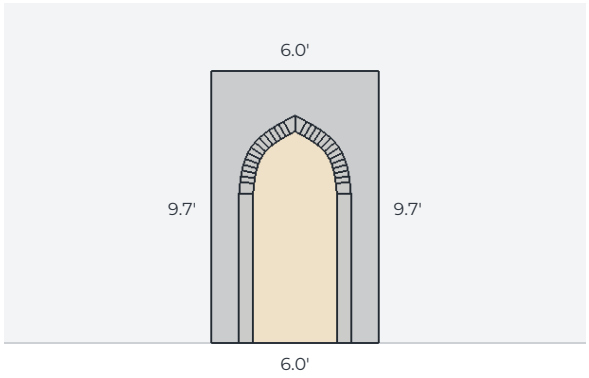


W 6.0' x H 9.7'

Brick

W55 / Hidden

58.5 sq ft net

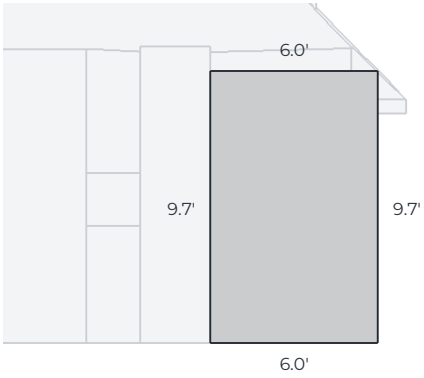

W 6.0' x H 9.7'

Brick

W14 / Right

57.5 sq ft net




W 2.5' x H 22.9'

Brick / Chimney

W15 / Right

41.9 sq ft net

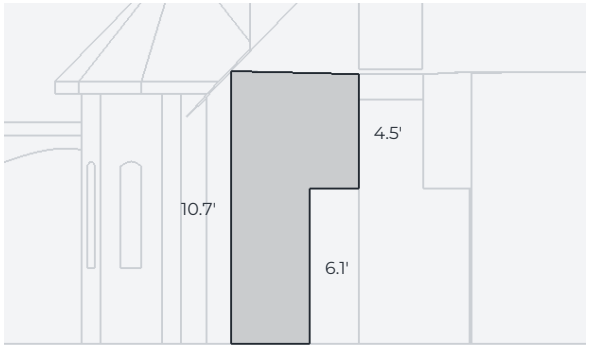


W 5.0' x H 10.7'

Brick

W24 / Front

32.1 sq ft net

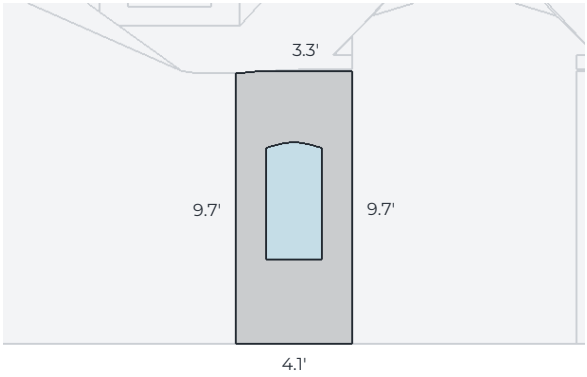


W 4.1' x H 9.7'

Brick

W22 / Front

18.2 sq ft net

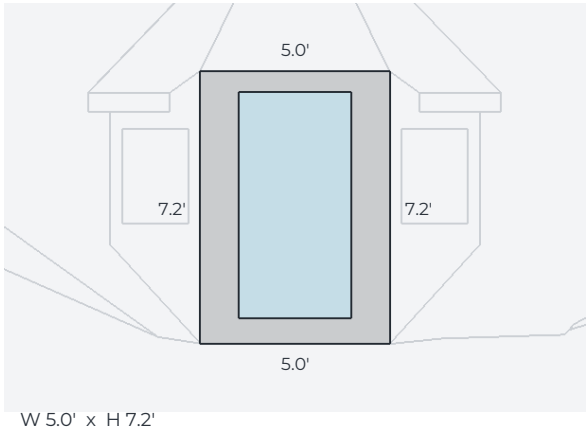


W 5.0' x H 7.2'

Brick

W34 / Front

18.2 sq ft net

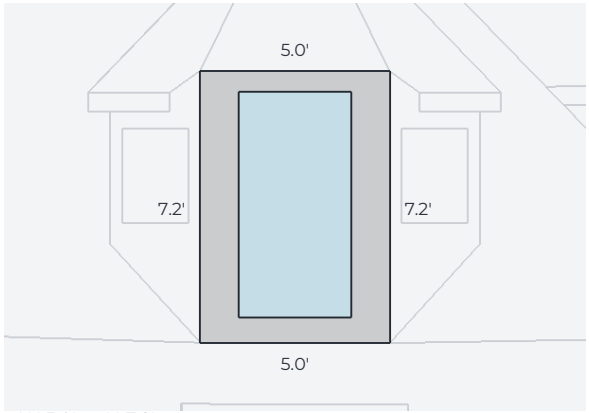


W 5.0' x H 7.2'

Brick

W42 / Left

18.2 sq ft net

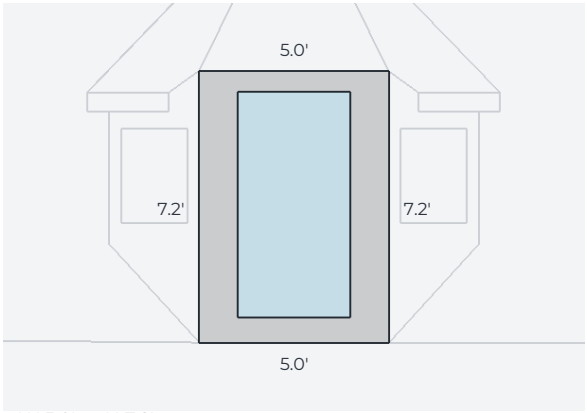


W 5.0' x H 7.2'

Brick

W29 / Front

29.7 sq ft net

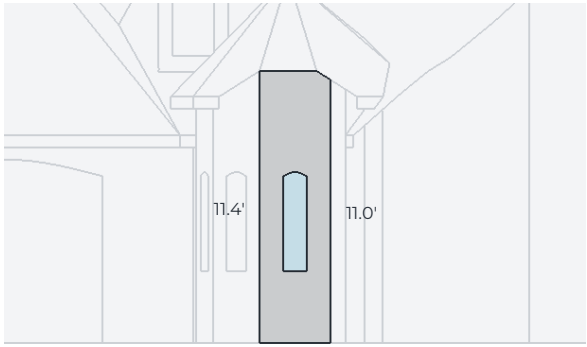


W 3.0' x H 11.4'

Brick

W50 / Front

29.7 sq ft net

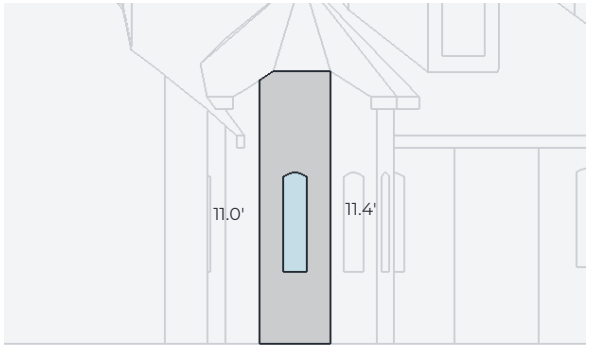


W 3.0' x H 11.4'

Brick

W56 / Left

30.8 sq ft net

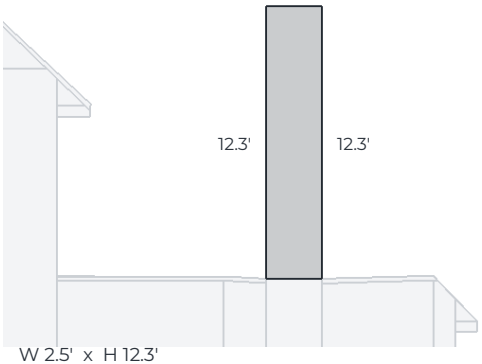


W 2.5' x H 12.3'

Brick / Chimney

W28 / Front

23.2 sq ft net

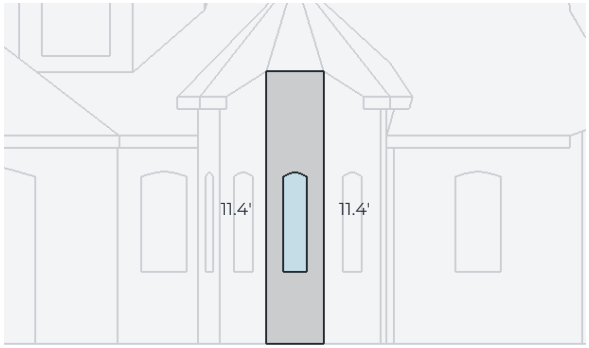


W 2.4' x H 11.4'

Brick

W51 / Front

23.2 sq ft net

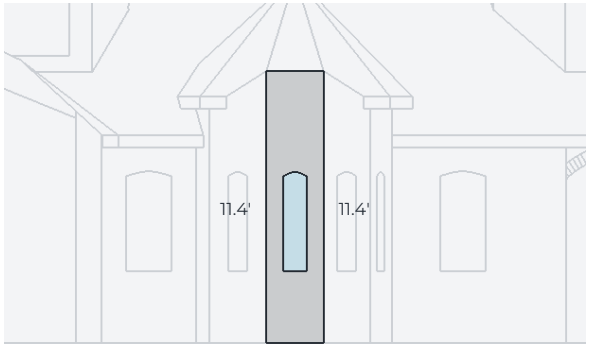


W 2.4' x H 11.4'

Brick

W18 / Front

13.8 sq ft net

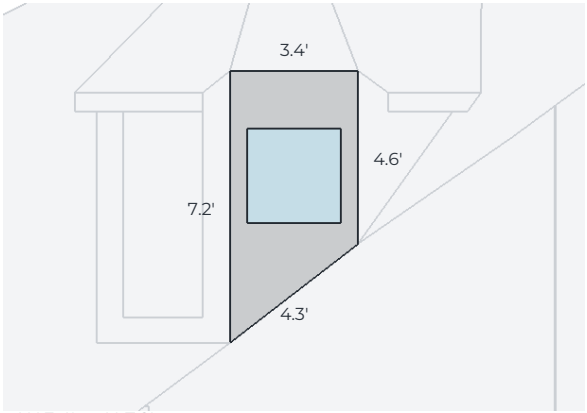


W 3.4' x H 7.2'

Brick

W36 / Front

13.8 sq ft net

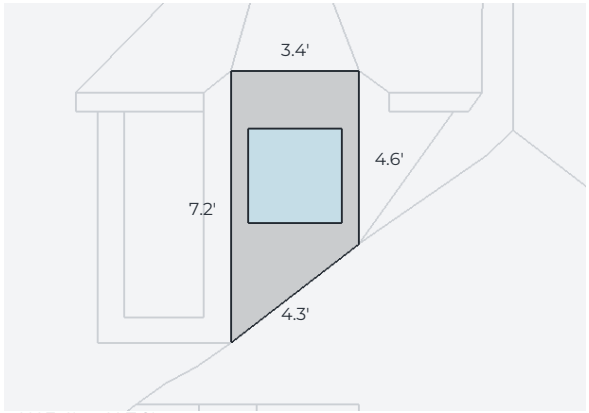


W 3.4' x H 7.2'

Brick

W63 / Hidden

13.8 sq ft net

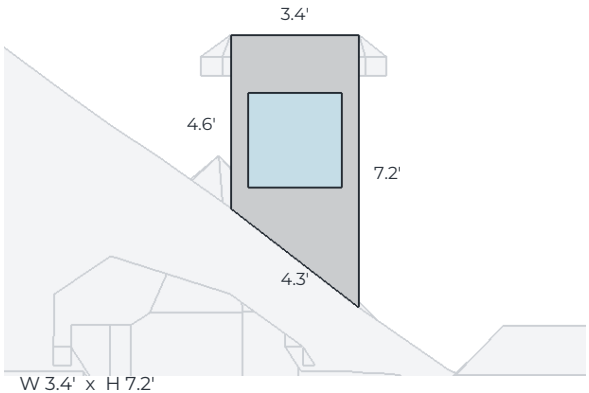

W 3.4' x H 7.2'

Brick

W49 / Hidden

20.0 sq ft net




W 2.3' x H 11.0'

Brick

W47 / Front

13.7 sq ft net

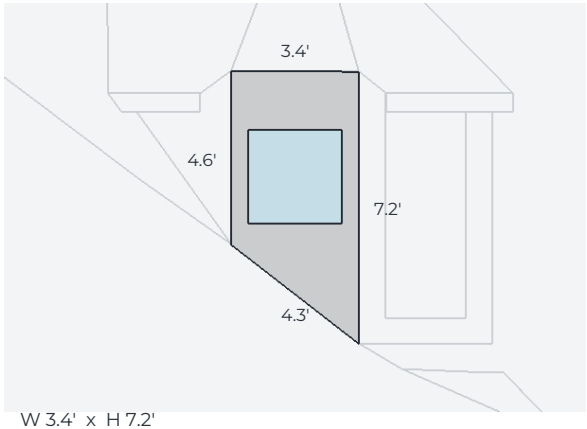


W 3.4' x H 7.2'

Brick

W53 / Front

13.7 sq ft net

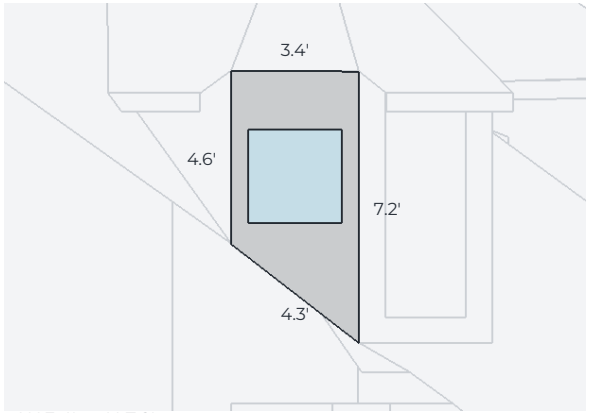


W 3.4' x H 7.2'

Brick

W59 / Left

13.7 sq ft net

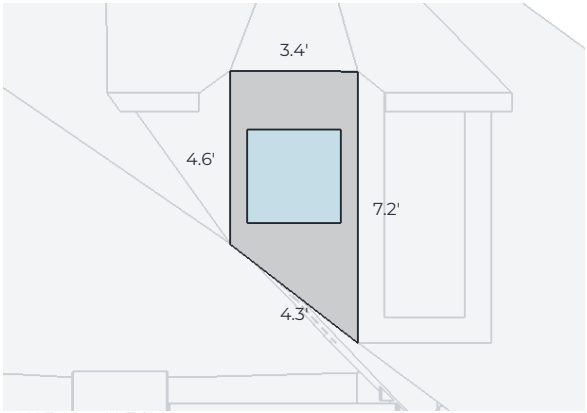

W 3.4' x H 7.2'

Brick

W62 / Back

18.8 sq ft net




W 2.0' x H 9.4'

Brick / Chimney

W54 / Back

18.7 sq ft net

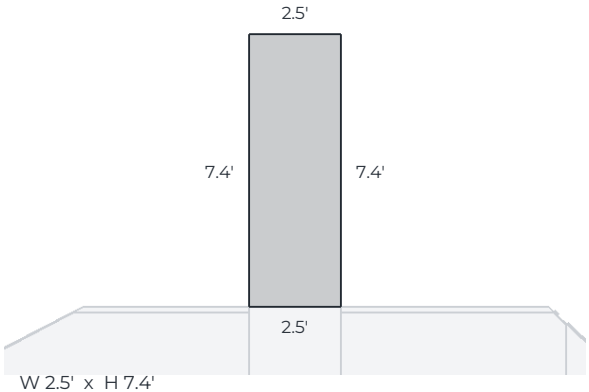


W 2.5' x H 7.4'

Brick / Chimney

W01 / Right

17.7 sq ft net

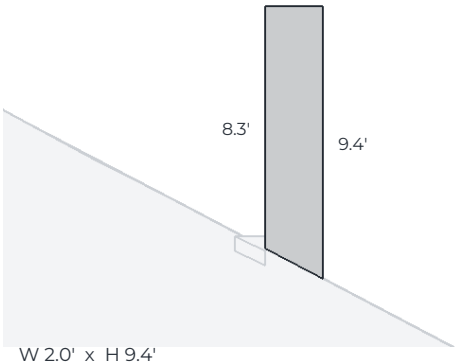


W 2.0' x H 9.4'

Brick / Chimney

W45 / Left

17.7 sq ft net

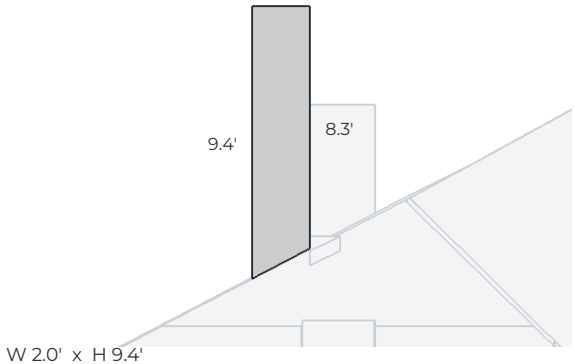


W 2.0' x H 9.4'

Brick / Chimney

W19 / Front

16.3 sq ft net

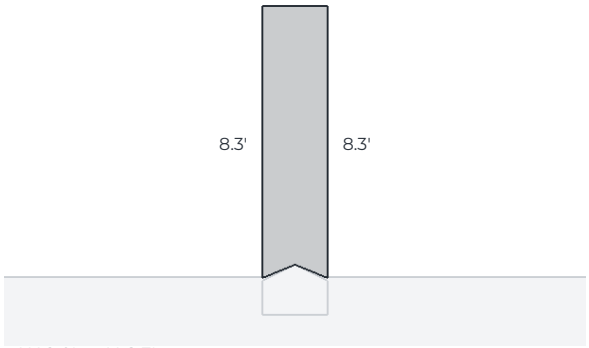


W 2.0' x H 8.3'

Brick / Chimney

W02 / Front

11.5 sq ft net

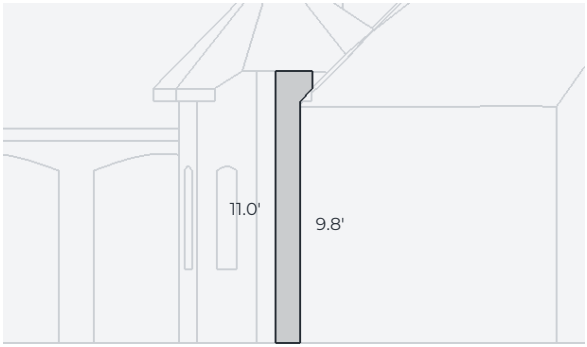


W 1.5' x H 11.0'

Brick

W46 / Hidden

10.5 sq ft net

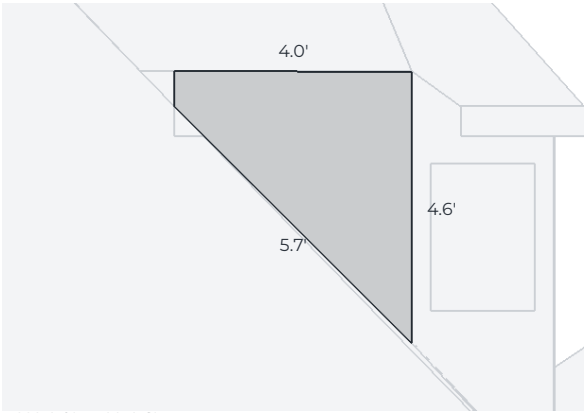


W 4.0' x H 4.6'

Brick

W52 / Hidden

10.5 sq ft net

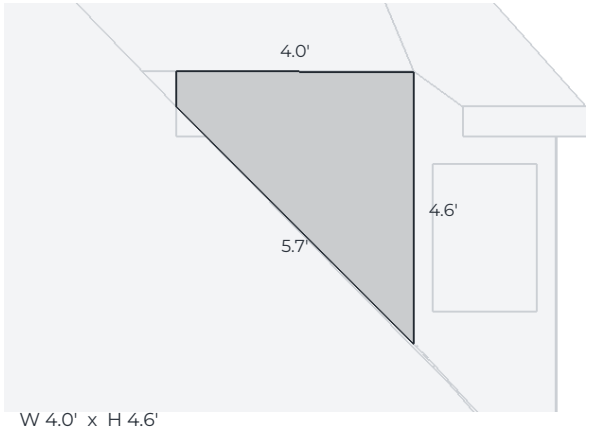


W 4.0' x H 4.6'

Brick

W58 / Left

10.5 sq ft net

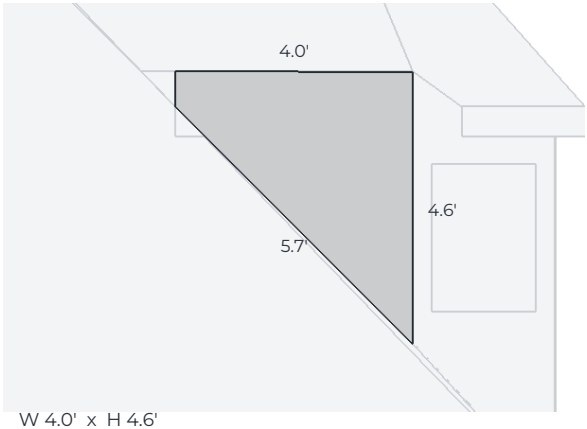


W 4.0' x H 4.6'

Brick

W07 / Front

10.4 sq ft net

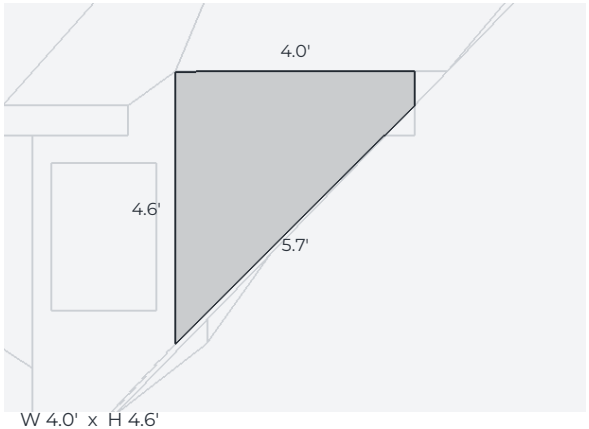


W 4.0' x H 4.6'

Brick

W48 / Hidden

10.4 sq ft net

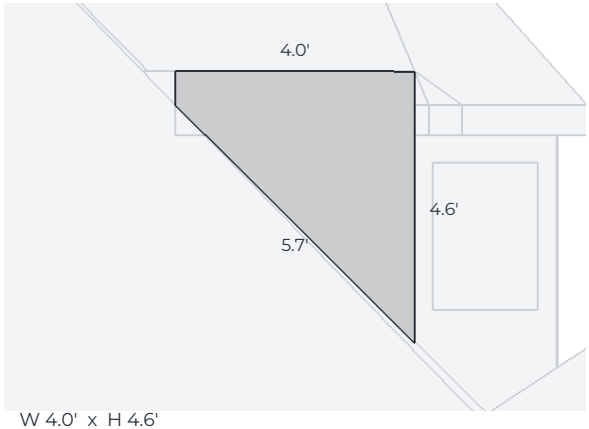


W 4.0' x H 4.6'

Brick

W60 / Hidden

10.4 sq ft net

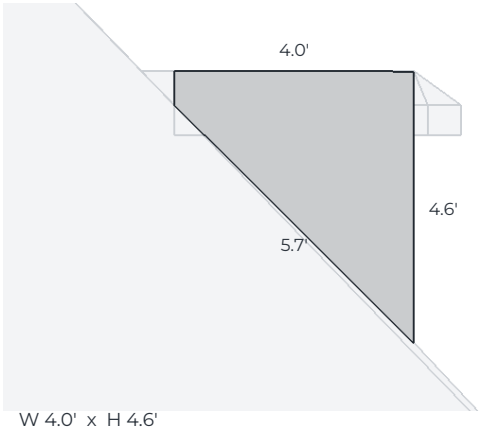


W 4.0' x H 4.6'

Brick

W64 / Right

10.1 sq ft net

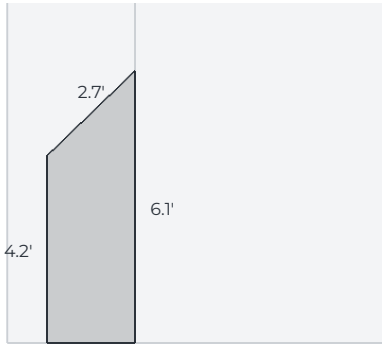


W 2.0' x H 6.1'

Brick

W37 / Front

10.1 sq ft net

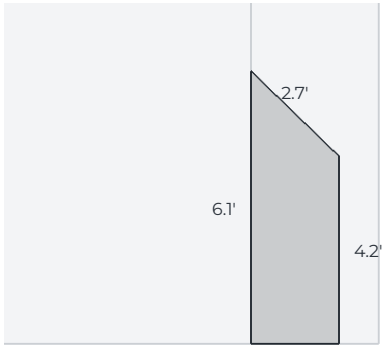


W 2.0' x H 6.1'

Brick

W40 / Front

10.1 sq ft net

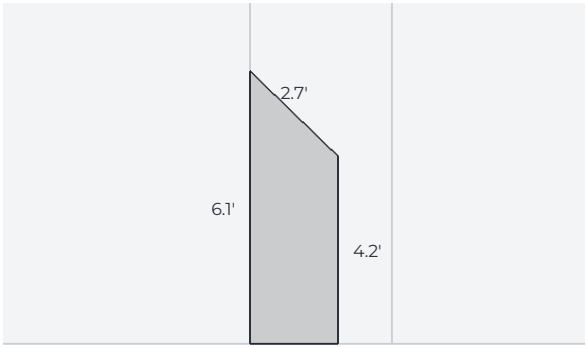


W 2.0' x H 6.1'

Brick

W66 / Right

10.1 sq ft net

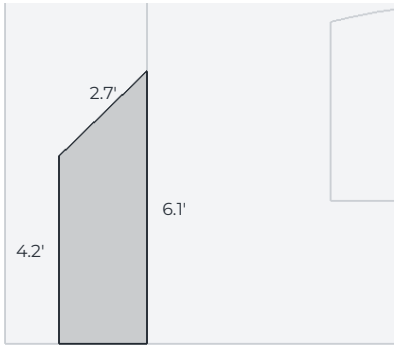


W 2.0' x H 6.1'

Brick

W17 / Right

9.9 sq ft net

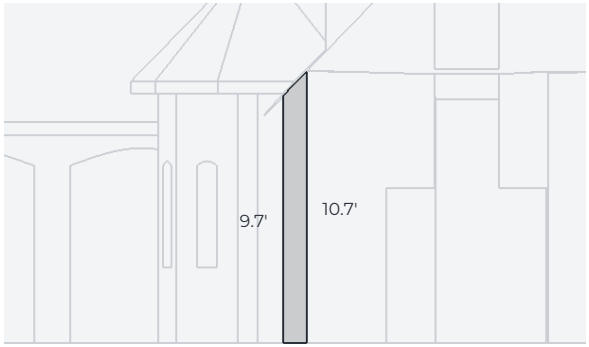


W 1.0' x H 10.7'

Brick

W12 / Right

8.8 sq ft net

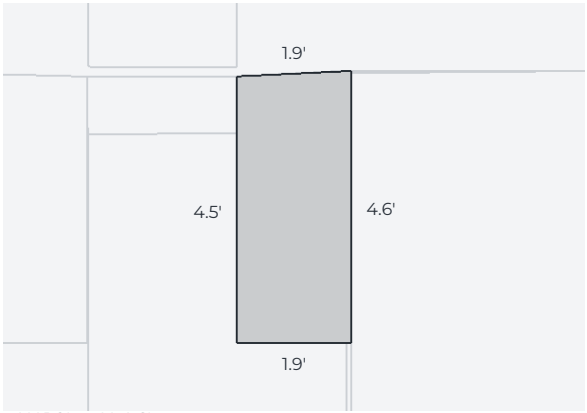


W 1.9' x H 4.6'

Brick

W03 / Front

8.6 sq ft net

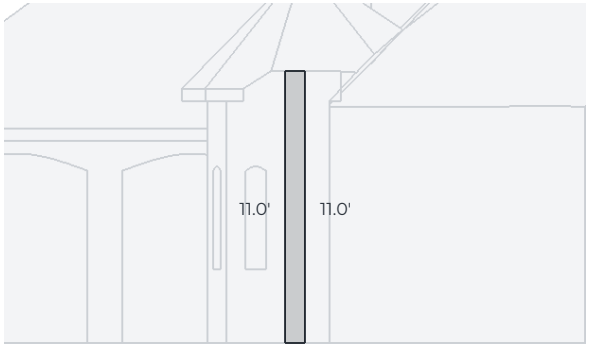


W 0.8' x H 11.0'

Brick

W13 / Right

8.1 sq ft net

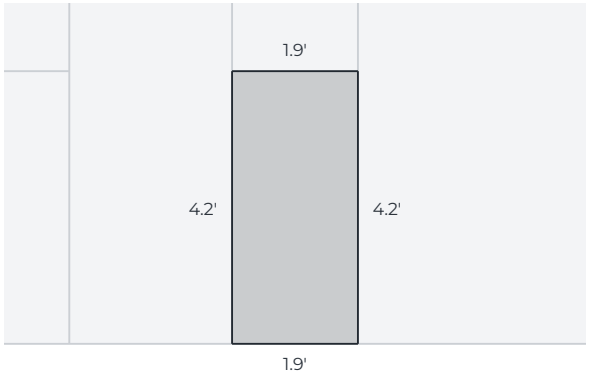


W 1.9' x H 4.2'

Brick

W06 / Right

8.1 sq ft net

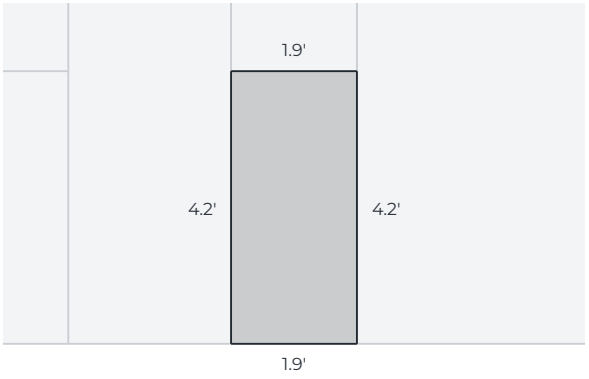


W 1.9' x H 4.2'

Brick

W10 / Right

8.1 sq ft net

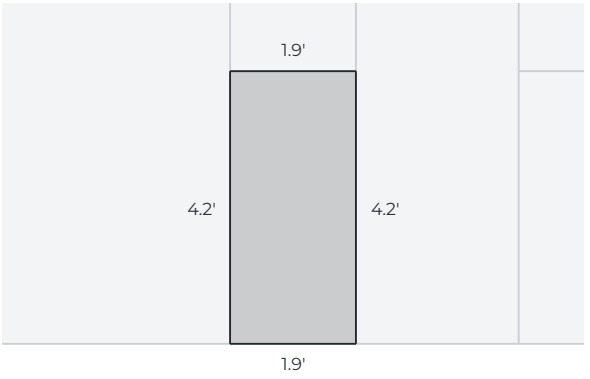


W 1.9' x H 4.2'

Brick

W16 / Right

8.1 sq ft net

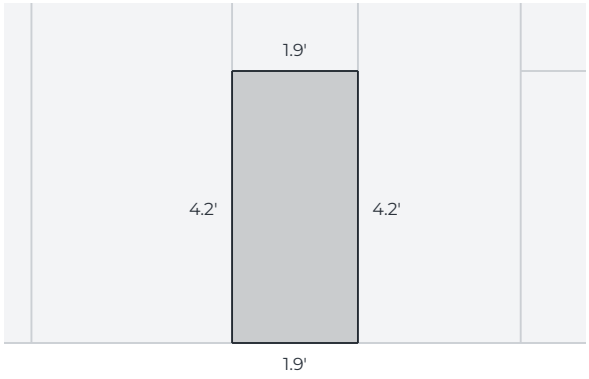


W 1.9' x H 4.2'

Brick

W27 / Hidden

1.1 sq ft net

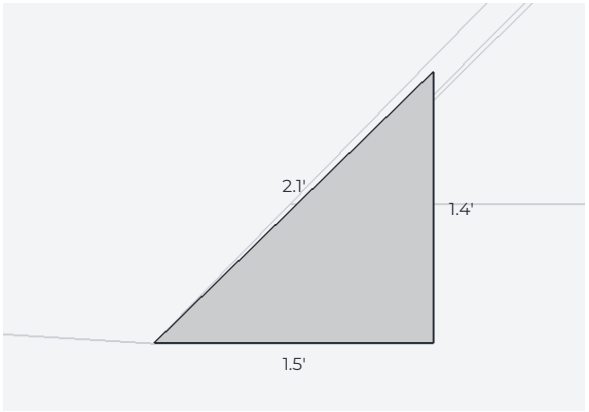


W 1.5' x H 1.4'

Brick

W25 / Front

0.2 sq ft net

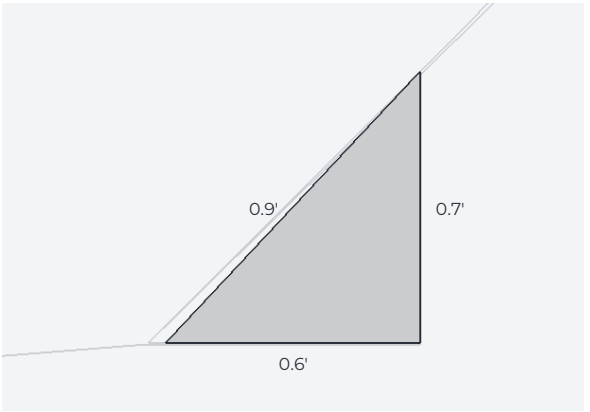


W 0.6' x H 0.7'

Brick

W26 / Front

0.2 sq ft net

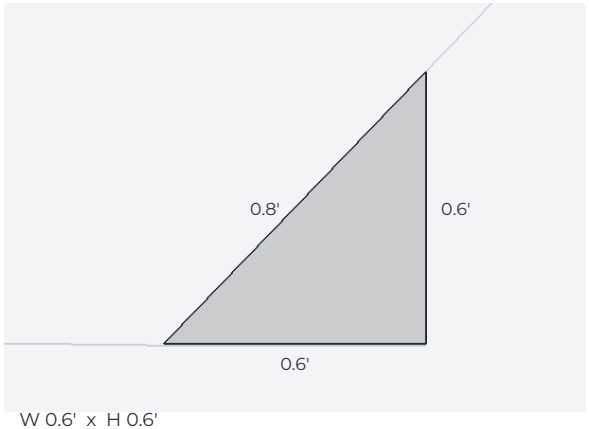


W 0.6' x H 0.6'

Brick

W20 / Front

0.2 sq ft net

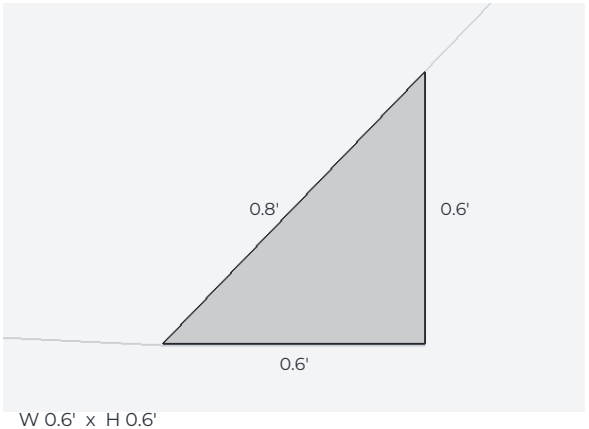


W 0.6' x H 0.6'

Brick

W41 / Left

0.2 sq ft net

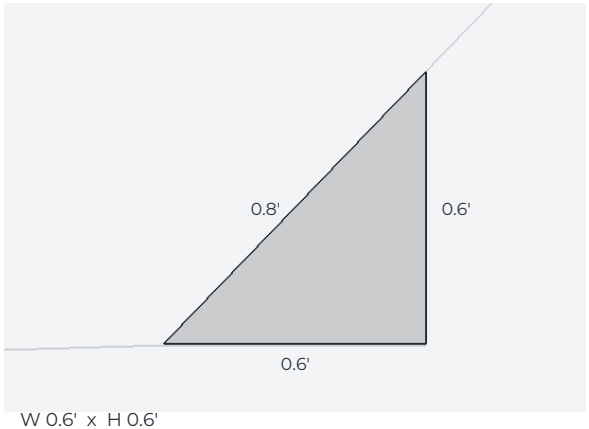


W 0.6' x H 0.6'

Brick

W33 / Front

0.2 sq ft net

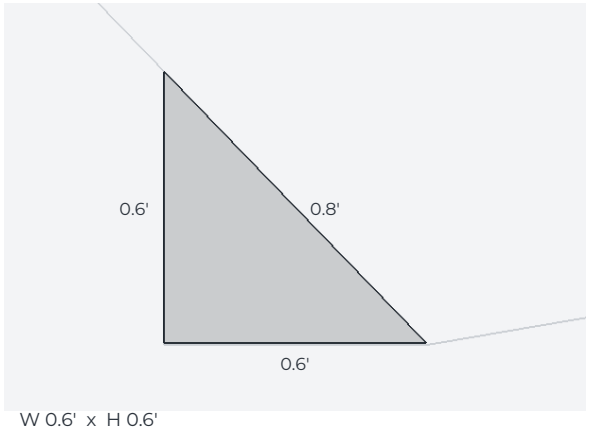


W 0.6' x H 0.6'

Brick

W21 / Front

0.2 sq ft net

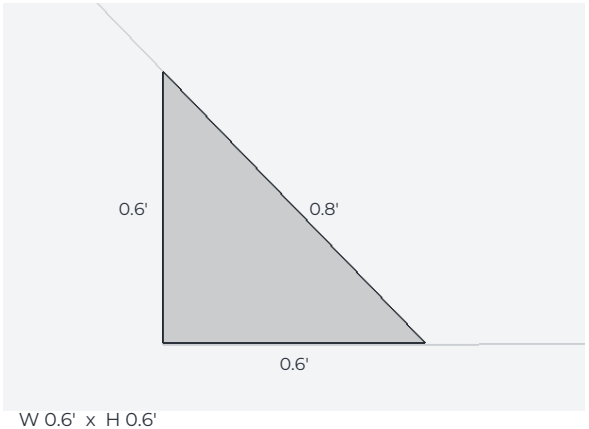


W 0.6' x H 0.6'

Brick

W44 / Left

0.2 sq ft net

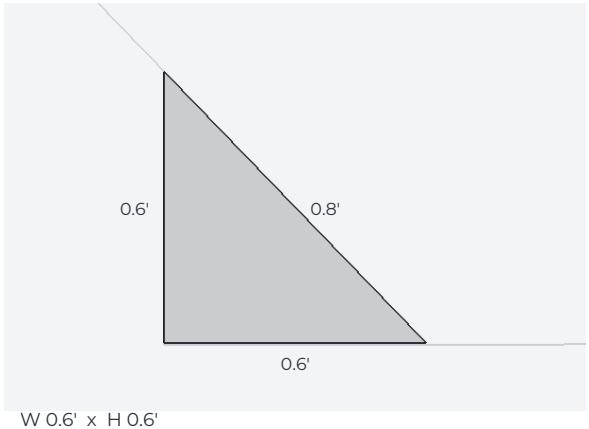

W 0.6' x H 0.6'

Brick

Opening Schedule

Dimensions are drawn extents, not manufacturer or rough-opening sizes. Trim ft is measured along the outside edge of the trim; - means the opening has no trim.

Opening	Type	Wall	W x H (ft)	Area ft2	Trim ft
W18-1	Window	W18	2.5 x 2.5	6.3	-
W22-1	Window	W22	3.0 x 6.0	18.0	-
W23-1	Garage door	W23	8.0 x 7.7	59.4	-
W23-2	Garage door	W23	8.0 x 7.7	59.4	-
W24-1	Window	W24	2.0 x 4.2	8.3	-
W28-1	Window	W28	1.0 x 4.2	4.1	-
W29-1	Window	W29	1.0 x 4.2	4.1	-
W30-1	Window	W30	2.0 x 4.2	8.3	-
W31-1	Door	W31	3.0 x 7.6	21.0	18.1
W32-1	Window	W32	2.0 x 4.2	8.3	-
W34-1	Window	W34	3.0 x 6.0	18.0	-
W36-1	Window	W36	2.5 x 2.5	6.3	-
W38-1	Window	W38	4.0 x 4.3	16.8	-
W42-1	Window	W42	3.0 x 6.0	18.0	-
W47-1	Window	W47	2.5 x 2.5	6.3	-
W50-1	Window	W50	1.0 x 4.2	4.1	-
W51-1	Window	W51	1.0 x 4.2	4.1	-
W53-1	Window	W53	2.5 x 2.5	6.3	-
W59-1	Window	W59	2.5 x 2.5	6.3	-
W63-1	Window	W63	2.5 x 2.5	6.3	-

Measured lengths

Quantity	Feet
Top of walls	389.5
Bottom of walls	401.3
Inside corners	102.9
Outside corners	410.1
Opening perimeter	286.2
Material transitions	0.0
Exposed vertical terminations	114.8

Trim

Trim	Feet
Window trim	-
Door trim	18.1
Garage door trim	-
Horizontal wall trim	-
Vertical wall trim	-
Roof trim (fascia)	345.1
Total trim	363.2

Net area by material

Material	Area (sq ft)	Squares
Brick	4,261.0	42.6


Area including waste (sq ft)

Material	0%	5%	10%	15%	20%
Brick	4,261.0	4,474.0	4,687.1	4,900.1	5,113.2

Squares including waste

Material	0%	5%	10%	15%	20%
Brick	42.6	44.7	46.9	49.0	51.1

Waste percentages are comparison allowances applied to net wall area. Horizontal returns are measured separately.

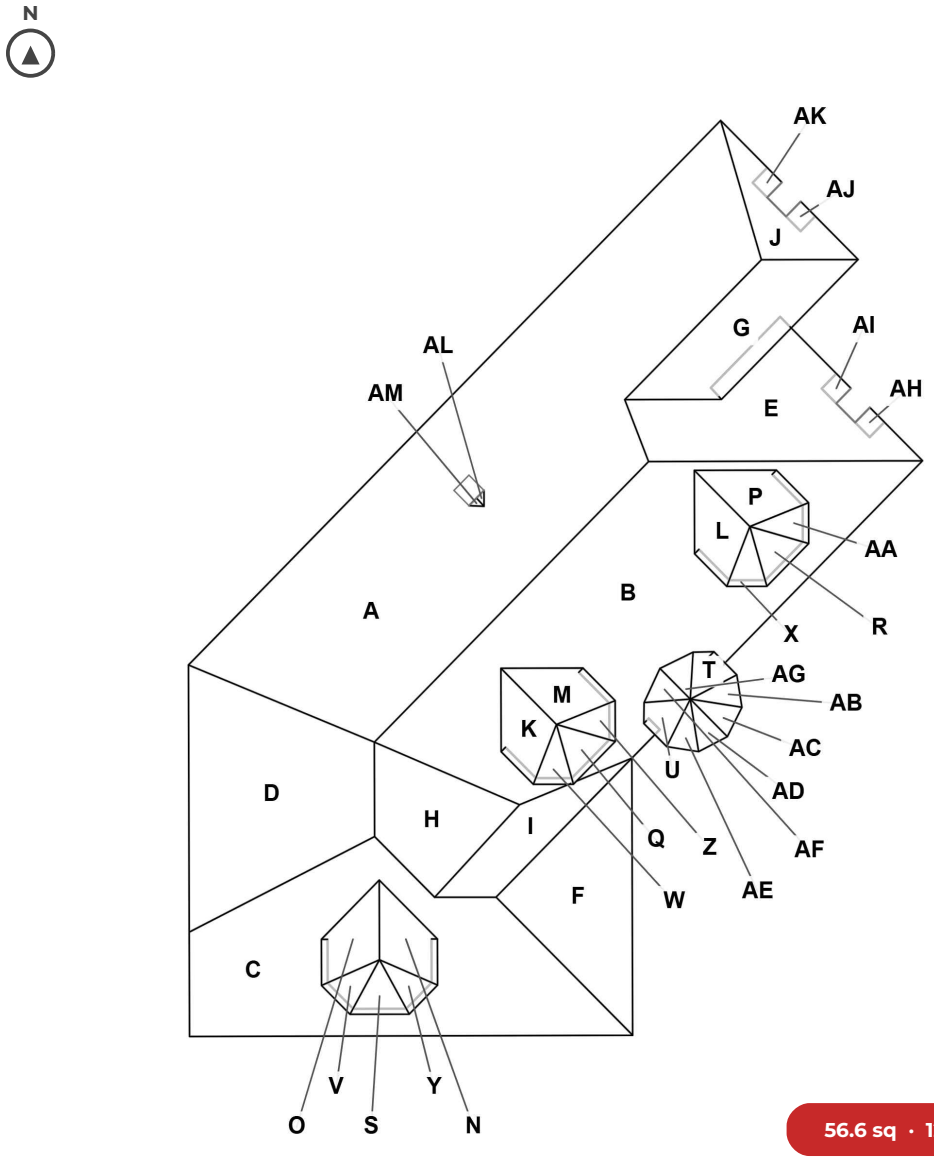


56.6 sq · 12/12 · 39 facets

NOTES


Front




Back

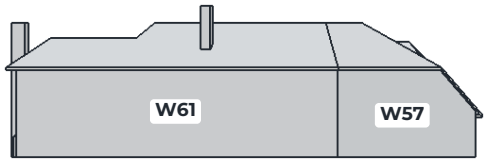

Left

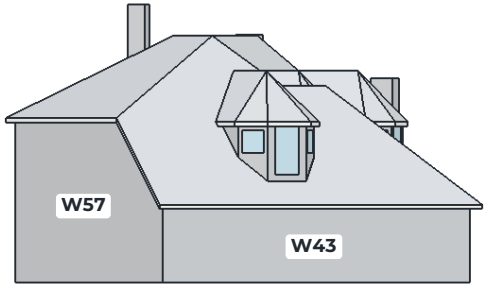

Right

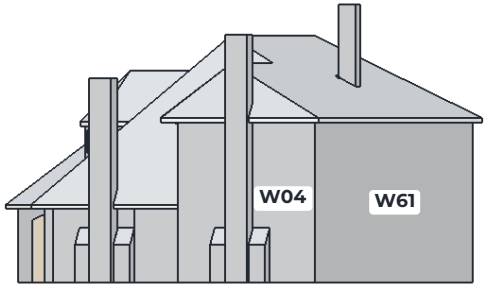

NOTES